

SA_D-W25 & B_{LD}-W25 Series

0.25W, FIXED INPUT, ISOLATED & UNREGULATED
DUAL/SINGLE OUTPUT DC-DC CONVERTER

multi-country patent protection RoHS

FEATURES

1KVDC Isolation
DIP Package
Internal SMD Construction
Temperature Range: -40°C to +85°C
No Heatsink Required
No External Component Required
Industry Standard Pinout
RoHS Compliance

APPLICATIONS

The SA_D-W25 & SB_{LD}-W25 Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

SB0505LD-W25

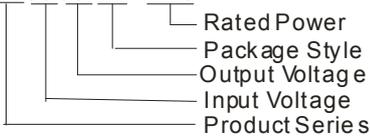

PRODUCT PROGRAM

Part Number	Input		Output		Efficiency (% Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA) Max	
	Nominal	Range			
SB0303LD-W25*	3.3	3.0-3.6	3.3	75.8	62
SB0305LD-W25*			5	50	65
SA0505D- W25	5	4.5-5.5	± 5	± 25	62
SA0509D- W25*			± 9	± 13.8	64
SA0512D- W25*			± 12	± 10.4	66
SA0515D- W25*			± 15	± 8.3	65
SB0505LD- W25			5	50	64
SB0509 LD- W25*			9	27.8	65
SB0512 LD- W25	12	20.8	67		
SB0515 LD- W25	15	16.7	65		
SA1205D- W25*	12	10.8-13.2	± 5	± 25	62
SA1209D- W25*			± 9	± 13.8	63
SA1212D- W25*			± 12	± 10.4	64
SA1215D- W25*			± 15	± 8.3	65
SB1203 LD- W25*			3.3	75.8	62
SB1205 LD- W25			5	50	65
SB1209 LD- W25*	9	27.8	66		
SB1212 LD- W25	12	20.8	67		
SB1215 LD- W25*	15	16.7	66		
SA2405D- W25*	24	21.6-26.4	± 5	± 25	63
SA2409D- W25*			± 9	± 13.8	64
SA2412D- W25*			± 12	± 10.4	65
SA2415D- W25*			± 15	± 8.3	65
SB2405 LD- W25			5	50	63
SB2409 LD- W25*			9	27.8	63
SB2412 LD- W25*	12	20.8	65		
SB2415 LD- W25*	15	16.7	65		
SB2424LD- W25*	24	10.4	64		

*Designing


COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Operating Temp. Range		-40		85	°C
Storage Temp. Range		-55		125	
Storage humidity range				95	%
Cooling	Free air convection				
Temp. rise at full load			15	25	°C
Lead temperature	1.5mm from case for 10 seconds		300		
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Short circuit protection				1	s
Case material	Plastic (UL94-V0)				
MTBF		3500			K hours
Weight			2.1		g


OUTPUT SPECIFICATIONS						
Item	Test conditions		Min	Typ	Max	Units
Output power					0.25	W
Line regulation	For Vin change of 1%	(3.3output)			±1.5	%
		(others output)			±1.2	
Load regulation	10% to 100% load	(3.3 output)		12	20	
		(5V output)		10.5	15	
		(9V output)		8.3	15	
		(12V output)		6.8	15	
		(15V output)		6.3	15	
Output voltage accuracy	See tolerance envelope graph					
Temperature drift	100% full load				0.03	%/°C
Ripple & Noise*	20MHz Bandwidth	(SAXXXD-W25)		50	75	mVp-p
		(SBXXXLD-W25)		75	100	
Switching frequency	Full load, nominal input		100			KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.
 Note:
 1.All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
 2.Dual output models unbalanced load: ±5%.

TYPICAL CHARACTERISTICS

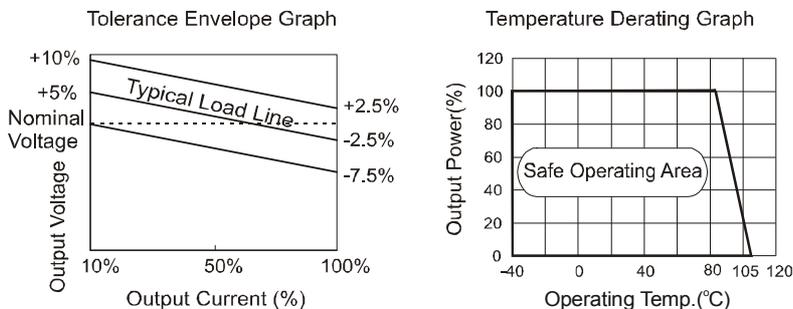

OUTLINE DIMENSIONS & PIN CONNECTIONS

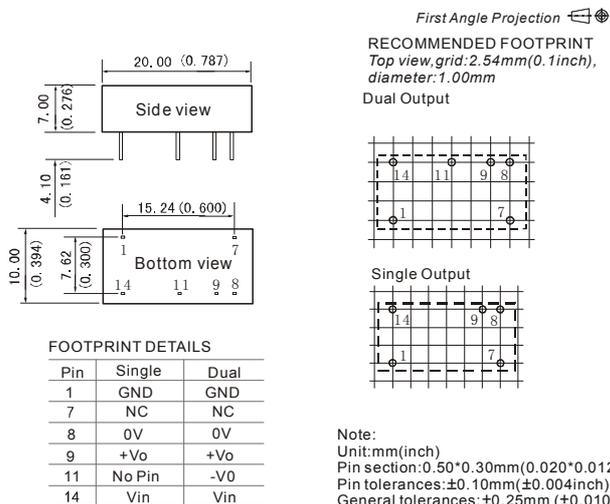


APPLICATION NOTE

Requirement on output load
 To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

Overload Protection
 Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.


Recommended circuit
 If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

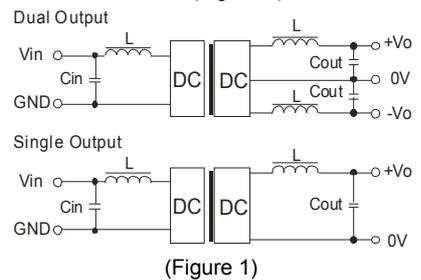

(Figure 1)
 It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. It's not recommended to connect any external capacitor in the application field.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

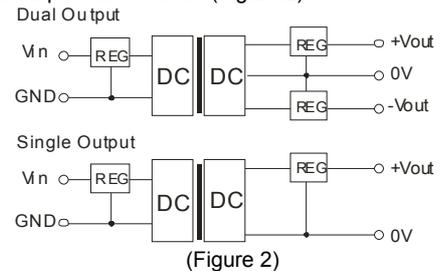

No parallel connection or plug and play.