

# DOUBLE OVEN LOW PROFILE ULTRA PRECISION OCXO MV180

## Features:

- Low sensitivity to rapid changes of ambient temperature
- Low profile package with the height of 19(17) mm
- High stability vs. temperature - up to  $\pm 1 \times 10^{-10}$
- Available as RoHS

Power supply	Output	Package type
5V	SIN	Z19 51.3x51.3x19 mm
12V	HCMOS	Z17 51.3x51.3x17 mm
		Y19 51.3x41.3x19 mm


ORDERING GUIDE: MV180-B 02 E -12V- SIN - Z19 - 10.0 MHz

Availability of certain stability vs. operating temperature		$\pm 1 \times 10^{-9}$	$\pm 5 \times 10^{-10}$	$\pm 3 \times 10^{-10}$	$\pm 2 \times 10^{-10}$	$\pm 1 \times 10^{-10}$		Availability of certain aging values for certain frequencies		Standard frequencies			
A	0...+55 °C	A	A	A	A	A	F	$\pm 5 \times 10^{-8}/\text{year}$	A	A	A	A	
B	-10...+60 °C	A	A	A	A	A	E	$\pm 3 \times 10^{-8}/\text{year}$	A	A	A	A	
C	-20...+70 °C	A	A	A	A	C	D	$\pm 2 \times 10^{-8}/\text{year}$	A	C	A	C	
D	-40...+70 °C	A	A	A	C	NA	C	$\pm 1 \times 10^{-8}/\text{year}$	C	NA	C	NA	
A – available, NA – not available, C – consult factory		A – available, NA – not available, C – consult factory											

For other temperature ranges see designation in the order guide


## Package drawings:

Z19:  
Z17:

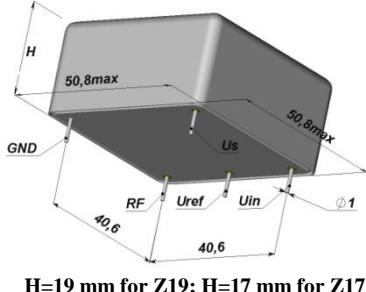

H=19 mm for Z19; H=17 mm for Z17.

Y19:

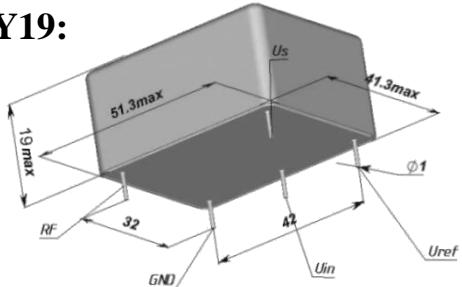

Short term stability (Allan deviation) per 1 sec, for 5 MHz and 10 MHz	$<2 \times 10^{-12}$		
Frequency stability vs. load changes	$<\pm 1 \times 10^{-10}$		
Frequency stability vs. power supply changes	$<\pm 1 \times 10^{-10}$		
Warm-up time with accuracy of $<\pm 1 \times 10^{-8}$ @ 25°C	$<5$ min		
Power supply (Us)	12V $\pm 5\%$	5V $\pm 5\%$	
Steady state current consumption @ 25°C	< 250 mA	< 600 mA	
Peak current consumption during warm-up: For "D" temperature range:	< 700 mA < 900 mA	< 1.4 A Consult	
Frequency pulling range with external control voltage range (Uin)	$>\pm 3 \times 10^{-7}$ 0...+5 V		
Reference voltage (Uref)	+5 V	+4 V	
Output	SIN	HCMOS	
Level	+7 $\pm 2$ dBm	<0.5V / >4.5V	
Load	50 Ohm $\pm 10\%$	10kOhm/30pF	
Harmonic and subharmonics suppression	>35dBc	-	
Phase noise, typical, dBc/Hz	for 10 MHz	for 5 MHz	
1 Hz	-100	-105	
10 Hz	-125	-130	
100 Hz	-140	-145	
1000 Hz	-145	-150	
10000 Hz	-150	-155	

## ADDITIONAL NOTES:

- Showed values of frequency stability vs. temperature usually are tested in still air test conditions. Please inform factory about different conditions in operation to provide appropriate tests.
- Please consult factory for daily aging values. Normally typical correspondence of daily aging per day to aging per year is as following:  $\pm 5 \times 10^{-8}/\text{year}$  -  $\pm 5 \times 10^{-10}/\text{day}$ ;  $\pm 3 \times 10^{-8}/\text{year}$  -  $\pm 3 \times 10^{-10}/\text{day}$ ;  $\pm 2 \times 10^{-8}/\text{year}$  -  $\pm 2 \times 10^{-10}/\text{day}$ ;  $\pm 1 \times 10^{-8}/\text{year}$  -  $\pm 1 \times 10^{-10}/\text{day}$
- Please mention RoHS requirement (if any) while requesting for quote or while placing PO.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

Frequency range	10-200 Hz
Acceleration	5g

Shock:	150 g
Acceleration	3 $\pm 1$ ms
Duration	
Storage	-55...+80 °C
temperature range	

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85