

Typical Performance

FEATURES

- Wide Input voltage range (12:1)
- Typical Efficiency:80%
- Switching frequency: 300KHz
- Short circuit protection,Self-furbish
- Input-output isolate 1500VDC
- PCB Board in-line type installs
- Metal case, Low Output Ripple



Technology parameter Test condition:General Nominal Line, Tc=25°C , Rated resistant load unless other wise specified

Input Feature	Min	Nom	Max	Notes
Input voltage(Vdc)	20	120	240	W 12:1
Remote ON/OFF				Non

Output Feature

Voltage accuracy		Vo1;Vo2	±1.0%
Line regulation	Nominal Load,full voltage input range	Vo1;Vo2	±0.2%
Load regulation	Nominal Input Voltage,20% ~ 100% Nominal Load	Vo1;Vo2	±0.5%
Ripple and noise	20MHz BM full load Vo≤5.0V, ≤50mVp-p; Vo≥48V, ≤180mVp-p; Other, ≤100mVp-p;test by 20M oscillograph		
Voltage adjust	Standard output voltage	TRIM	±10%(adjustable)
Peak Deviation	25% Rated Load Vary	ΔVo1/ Vo1	≤±5.0%
Dynamic Response Setting Time			≤200us

General Feature

Efficiency	Normal input , full load		80% typical
Switching frequency			300KHz typical
Operating temperature	Free air	Industrial level	-25°C ~ +55°C

Storage temperature			-40℃ ~ +105℃
Max case temperature			+90℃
Relative humidity			10%~90%
case material			Metal case
Isolation Voltage		Input-Output	1500VDC
		Input-Case	1500VDC
		Output-Case	500VDC
Isolation Resistance			10MΩ
Temperature Coefficient			≤±0.02%/℃
Cooling			Natural Convection
MTBF	BELLCORE TR332, (25℃)		2X10 ⁵ Hrs

NOTE:

(1)The module working environment temperature more than 55 ℃ need derating use (- 0.15W/℃), but the max shell temperature shall not be more than 90 ℃.

(2)Capacitive load:

The output of the module can be applied electrolytic capacitor, but too much capacity and low ESR may cause the module instability, or cause current limiting point become low,we recommend 100 u F/A of the output capacitance , the current is rated

Product Nomination Method

example	SL D 5 - 120 S 05 I						
	①	②	③	④	⑤	⑥	⑦
①	L:Wide voltage input: 12 : 1				⑥	output voltage	
②	Power adaptation mode: D (DC-DC)				⑦	I: Dual Route output Isolate	
③	Output power(W)					W: Super Wide input voltage	
④	Normal input voltage						
⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output						

Product Program

PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
SLD3-120S05	120V (20~240V)	5V	600mA				
SLD3-120S12		12V	250mA				
SLD3-120S15		15V	200mA				
SLD3-120S24		24V	125mA				


SLD3-120S48		48V	63mA				
SLD3-120D05		+5V	300mA	-5V	300mA		
SLD3-120D12		+12V	125mA	-12V	125mA		
SLD3-120D15		+15V	100mA	-15V	100mA		
SLD3-120D24		+24V	63mA	-24V	63mA		
SLD3-120D48		+48V	31mA	-48V	31mA		
SLD5-120S05		5V	1000mA				
SLD5-120S12		12V	410mA				
SLD5-120S15		15V	330mA				
SLD5-120S24		24V	210mA				
SLD5-120S48		48V	104mA				
SLD5-120D05		+5V	500 mA	-5V	500 mA		
SLD5-120D12		+12V	205 mA	-12V	205 mA		
SLD5-120D15		+15V	165 mA	-15V	165 mA		
SLD5-120D24		+24V	100 mA	-24V	100 mA		
SLD5-120D48		+48V	52mA	-48V	52mA		

NOTE:

(1) This series, if the nominal input is 12V, the module does not support long time short circuit protection, short time should be controlled within 20 S.

(2) The output ripple noise (peak value) measurement, please reference module test instructions.


Mechanical Dimension

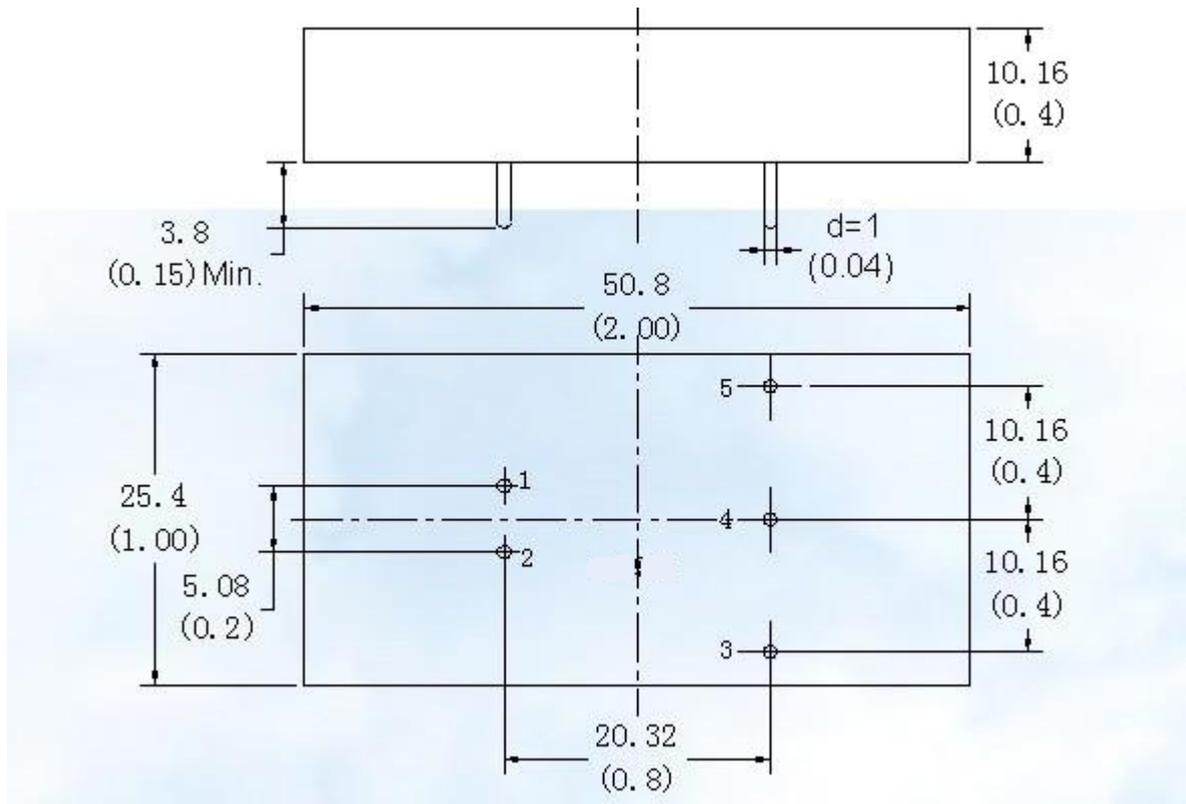

BOTTON VIEW

UNIT:mm(inch)

Temperature Curve

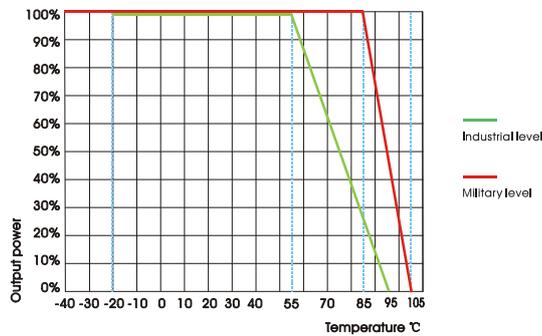

Mechanical Data

WATT	L x W x H	Packing No.
3-5W	50.80*25.40*10.16mm(2*1*0.4inch)	

Pin Assignment

PIN	1	2	3	4	5					
Single O/P	+Vin	-Vin	GND	NP	Vo					
Dual O/P	+Vin	-Vin	-Vo2	COM	+Vo1					

*Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.