

SJ 19" WALL-MOUNTED NETWORK CABINET



SJ cabinet 12 U with safety glass door



SJ cabinet 18 U with safety glass door

SINGLE-SECTION CABINET

- Designed for indoor applications.
- Available in 2 depths and 5 usable heights (see reference chart).
- The design of the cabinet is based on a metal body with safety glass door and removable rear panel.
- A standard cabinet is equipped with two easily adjustable mounting angles spaced at 19".
- The steel door and rear panel are provided with earthing cables.
- The body of the cabinet has two cable openings. One cable opening is completed with brush strip, the other with knock-out blanking plate.
- The door opening direction and cable opening layout can be easily changed by rotating the cabinet by 180°.
- Wide range of supplementary accessories: shelves, drawers, fan kit, power strips etc.
- Cabinet can be equipped with additional rear adjustable 19" mounting angles or mounting profiles.

TECHNICAL DATA

Material

Body, rear panel, mounting angles - sheet steel
 Door - safety glass or sheet steel

Surface finishing:

Powder paint, light grey (RAL 7035).
 All other colour options on request.
 Mounting angles - Al-Zn coated.

Protection degree:

IP 20 in accordance with EN 60529
 (does not apply to brush cable entries).

SCOPE OF DELIVERY

Single-section body, door, rear panel, earthing cable for rear panel, door earthing cable (only for steel door), 2 mounting angles, brush, template for drilling holes in the wall.




Top plate of SJ cabinet



Bottom plate of SJ cabinet

WALL-MOUNTED NETWORK CABINET **SJ 19"**

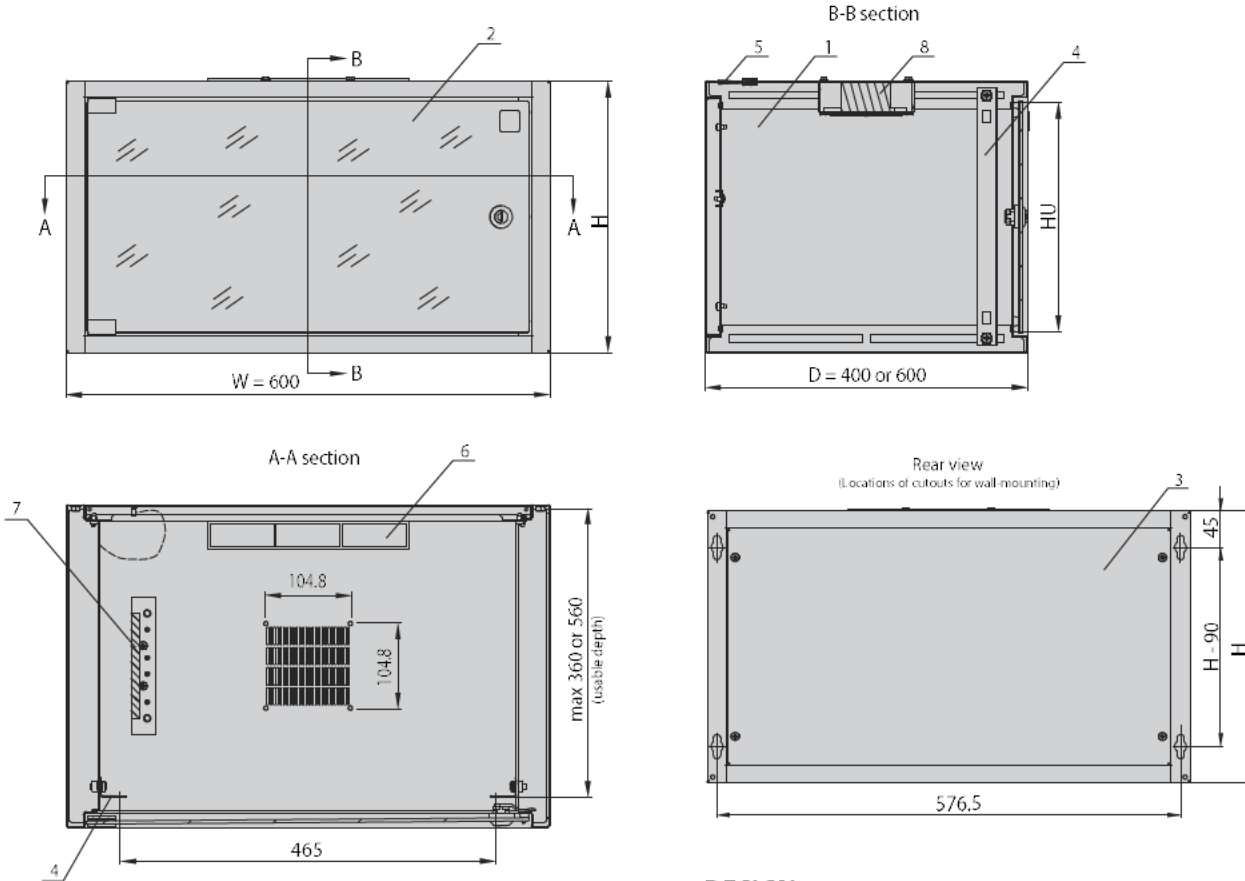

DESIGN

1. Cabinet's body
2. Glass door (steel door as an option)
3. Rear panel
4. Mounting angle
5. Brush strip
6. Knock-out blanking plate

Supplementary accessories ordered separately:
 7. Earthing bar
 8. Fan

REFERENCE CHART

Total width W [mm]	Total depth D [mm]	Total height H [mm]	Usable height HU [U = 44.45 mm]	Maximum load capacity [kg]	Catalogue number	
					Cabinet with glass door	Cabinet with steel door
600	600	871	18 U	30	WZ-3715-01-05-011	WZ-3715-01-10-011
		737	15 U	25	WZ-3715-01-04-011	WZ-3715-01-09-011
		604	12 U	25	WZ-3715-01-03-011	WZ-3715-01-08-011
		515	10 U	20	WZ-3715-01-02-011	WZ-3715-01-07-011
		337	6 U	20	WZ-3715-01-01-011	WZ-3715-01-06-011
600	400	871	18 U	40	WZ-3504-01-05-011	WZ-3504-01-M5-011
		737	15 U	35	WZ-3504-01-04-011	WZ-3504-01-M4-011
		604	12 U	30	WZ-3504-01-03-011	WZ-3504-01-M3-011
		515	10 U	30	WZ-3504-01-02-011	WZ-3504-01-M2-011
		337	6 U	25	WZ-3504-01-01-011	WZ-3504-01-M1-011