


DC/DC Converter

SA_S-2WR3 & SB_S-2WR3 series

SCHMID-M

2W isolated DC-DC converter
Fixed input voltage, unregulated dual/ single output

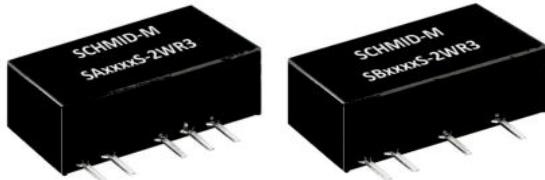

Patent Protection RoHS

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 86%
- High power density
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out
- IEC62368, UL62368, EN62368 approved



SA_S-2WR3 & SB_S-2WR3 series is designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits, where:

1. The voltage of the input power supply is relatively stable with a variation of $\pm 10\%$ Vin or less;
2. An input to output isolation voltage of up to 1500VDC is necessary;
3. The requirement for a tight output regulation is not as strict.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load*(μ F) Max.
			Nominal (Range)	Voltage (VDC)		
UL/CE/CB	SA1203S-2WR3	12 (10.8-13.2)	±3.3	±303/±30	71/75	1200
	SA1205S-2WR3			±200/±20	76/80	
	SA1207S-2WR3			±139/±13	76/80	470
	SA1209S-2WR3			±111/±11	78/82	
	SA1212S-2WR3			±83/±8	79/83	220
	SA1215S-2WR3		±15	±67/±7	79/83	
	SA1224S-2WR3			±42/±4	79/83	100
	SB1203S-2WR3			400/40	75/79	2400
	SB1205S-2WR3			400/40	78/82	2400
	SB1209S-2WR3			222/22	78/82	1000
UL/CE/CB	SB1212S-2WR3	15 (13.5-16.5)	12	167/17	80/84	560
	SB1215S-2WR3			133/13	81/85	
	SB1224S-2WR3			83/8	82/86	220
	SA1505S-2WR3		±5	±200/±20	76/80	1200
	SA1515S-2WR3			±67/±7	78/82	220
--	SB1505S-2WR3	24 (21.6-26.4)	5	400/40	76/80	2400
	SB1515S-2WR3			133/13	77/81	560
	SB1524S-2WR3			83/8	77/81	220
	SA2403S-2WR3		±3.3	±303/±30	70/76	1200
	SA2405S-2WR3			±200/±20	74/80	
	SA2407S-2WR3			±139/±13	74/80	470
	SA2409S-2WR3		±9	±111/±11	75/81	
	SA2412S-2WR3			±83/±8	77/83	220
	SA2415S-2WR3			±67/±7	77/83	
	SA2424S-2WR3		±24	±42/±4	77/83	100
	SB2403S-2WR3			400/40	70/76	2400
UL/CE/CB	SB2405S-2WR3		3.3	400/40	74/80	2400
--	SB2409S-2WR3			222/22	75/81	1000
UL/CE/CB	SB2412S-2WR3		12	167/17	78/84	560

DC/DC Converter

SA_S-2WR3 & SB_S-2WR3 series

UL/CE/CB	SB2415S-2WR3 SB2424S-2WR3	24 (21.6-26.4)	15 24	133/13 83/8	80/86 80/86	560 220
----------	------------------------------	-------------------	----------	----------------	----------------	------------

Note: * The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	12V input	--	208/8	--	mA	
	15V input	--	167/8	--		
	24V input	--	104/8	--		
Reflected Ripple Current		--	15	--		
Surge Voltage (1sec. max.)	12V input	-0.7	--	18	VDC	
	15V input	-0.7	--	21		
	24V input	-0.7	--	30		
Input Filter			Capacitance filter			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy		See output regulation curve(Fig. 1)			
Linear Regulation	Input voltage change: ±1%	3.3VDC output	--	--	±1.5
		Others	--	--	±1.2
Load Regulation	10%-100% load	3.3VDC output	--	15	--
		5VDC output	--	7	--
		7.2VDC output	--	6	--
		9VDC output	--	5	--
		12VDC output	--	5	--
		15VDC output	--	4	--
		24VDC output	--	3	--
Ripple & Noise*	20MHz bandwidth	--	75	180	mVp-p
Temperature Coefficient	Full load	--	±0.02	--	%/°C
Short-circuit Protection		Continuous, self-recovery			

Notes: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$, (see Fig. 2)	-40	--	105	°C
Storage Temperature		-55	--	125	
Case Temperature Rise	T _a =25°C	--	15	--	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
Storage Humidity	Non-condensing	5	--	95	%RH
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	--	260	--	kHz
MTBF	MIL-HDBK-217F @ 25°C	3500	--	--	k hours

DC/DC Converter

SA_S-2WR3 & SB_S-2WR3 series

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	19.65 x 7.05 x 10.16mm
Weight	2.4g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emission	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B

Note: Refer to Fig.4 for recommended circuit test

Typical Performance Curves

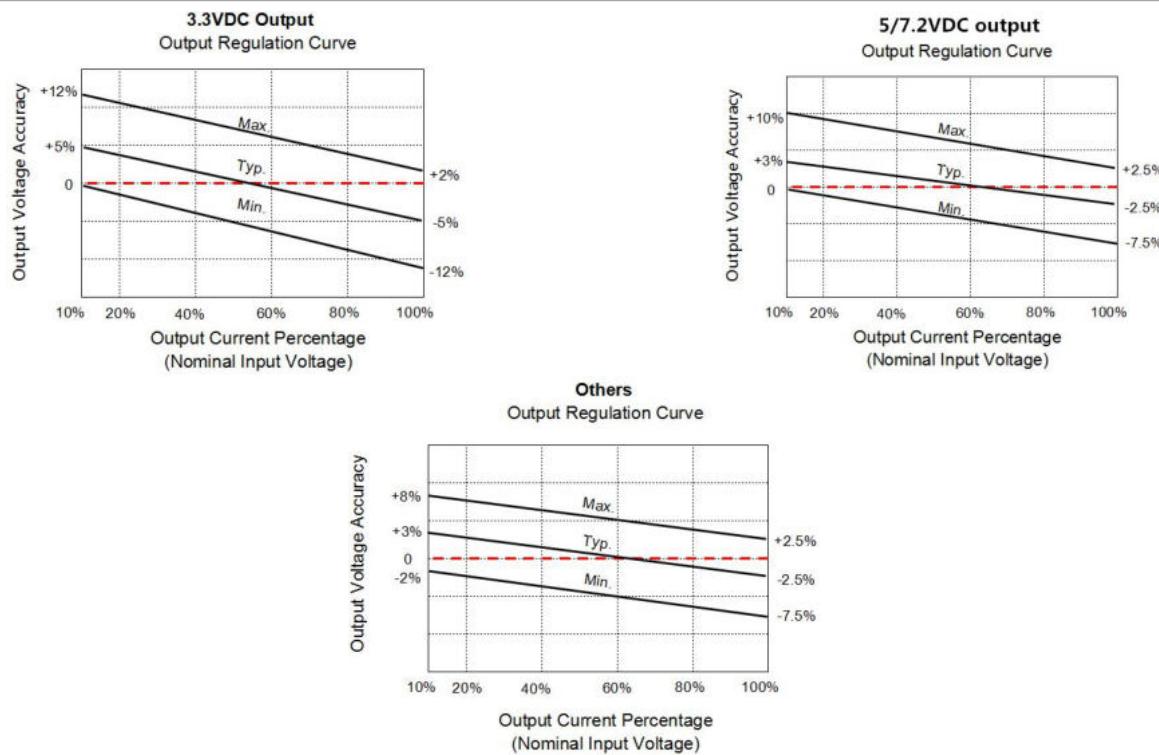


Fig. 1
Temperature Derating Curve

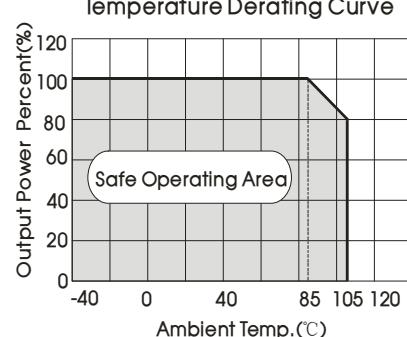


Fig. 2

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problem caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

DC/DC Converter

SA_S-2WR3 & SB_S-2WR3 series

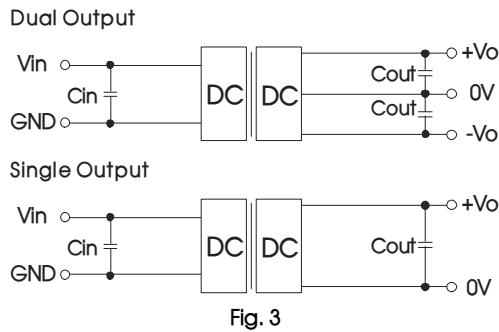


Fig. 3


Table 1: Recommended input and output capacitor values

Vin	Cin	Single Vout	Cout	Dual Vout	Cout'
12VDC	2.2μF/25V	3.3VDC	10μF/16V	±3.3VDC	4.7μF/16V
15VDC	2.2μF/25V	5VDC	10μF/16V	±5VDC	4.7μF/16V
24VDC	1μF/50V	9VDC	2.2μF/25V	±7.2VDC	2.2μF/25V
--	--	12VDC	2.2μF/25V	±9VDC	2.2μF/25V
--	--	15VDC	1μF/25V	±12VDC	1μF/25V
--	--	24VDC	1μF/50V	±15VDC	1μF/25V
--	--	--	--	±24VDC	0.47μF/50V

Note: The capacitor value of the positive and the negative output is identical.

2. EMC compliance circuit

Single Output

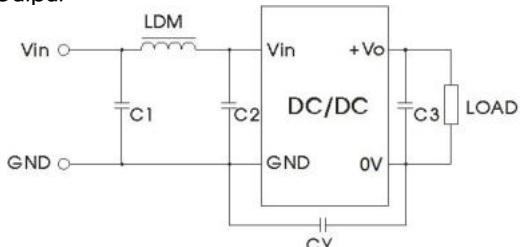

Dual Output

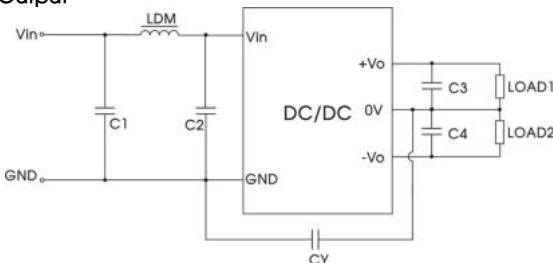





Fig. 4

Input voltage (VDC)	12/15/24
C1/C2	4.7μF /50V
CY	270pF/2kV
C3	Refer to Cout in Fig.3
LDM	6.8μH

Input voltage (VDC)	12/15/24
C1/C2	4.7μF /50V
CY	270pF/2kV
C3/C4	Refer to Cout in Fig.3
LDM	6.8μH

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

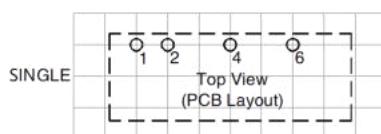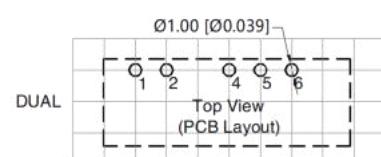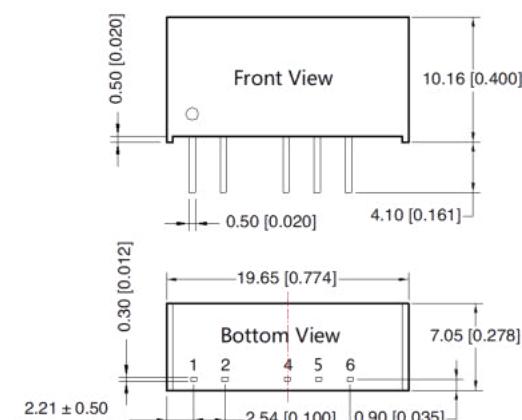

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
4	0V	-Vo
5	No Pin	0V
6	+Vo	+Vo

DC/DC Converter

SA_S-2WR3 & SB_S-2WR3 series

Notes:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25\text{ }^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.