

SMK-3W Series

3W 4:1 Regulated Single & Dual output

Features

- Wide 4:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3000 VDC
- Continuous Short Circuit Protection
- Efficiency up to 81%
- -40°C~ 85°C Operation Temperature Range
- EMC filter meets EN55022 Class A without adding external components
- Non-conductive Black Plastic DIL24-pin case

SCHMID-M





The SMK series is a family of cost effective 3W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3000VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages are 24Vdc and 48Vdc, with output voltages are 3.3,5,12,15,24, ± 3.3 , ± 5 , ± 12 , ± 15 and ± 24 Vdc. Featuring high efficiency operation up to 81% and output voltage accuracy of $\pm 2\%$ maximum. Also, no additional components adding required to comply with EN55022 Class A.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS			GENERAL SPECIFICATIONS	
Output Voltage Accuracy		$\pm 2\%$	Efficiency	See table, typ.
Output Voltage Blance(Dual Output)		$\pm 2\%$	I/O Isolation Voltage(60 sec)	
Maximum Output Current		See table	Input/Output	1500~3000Vdc
Line Regulation		$\pm 0.5\%$, max.	I/O Isolation Capacitance	1000 pF, typ.
Load Regulation(0% to 100%)		$\pm 1.2\%$, max.	I/O Isolation Resistance	1000M Ohm
Cross Regulation (Dual Output) (1)		$\pm 5\%$	Switching Frequency	330kHz, typ.
Ripple&Noise (20MHz Bandwidth)(2)		80mVpk-pk, max.	Humidity	95% rel H
	Dual Output 24V:100mVpk-pk, max.		Reliability Calculated MTBF(MIL-HDBK-217 F)	>800 Khrs
Over Load Protection		160% of Iout, typ.	Safety Standard	UL/cUL 60950-1 , IEC/EN 60950-1
Short Circuit Protection		Indefinite(hiccup) (Automatic Recovery)	Safety Approvals	UL/cUL 60950-1 , IEC/EN 60950-1
Temperature Coefficient		$\pm 0.02\%/^{\circ}\text{C}$	PHYSICAL SPECIFICATIONS	
Capacitive Load (3)		See table	Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Transient Recovery Time (4)		300us, typ.	Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Transient Response Deviation (4)		$\pm 3\%$, max.	Pin Material	$\Phi 0.5\text{mm}$ Brass Solder-coated
	Single Output 3.3V: $\pm 5\%$, max.		Potting Material	Epoxy (UL94V-0 rated)
			Weight	13g
			Dimensions	1.25"x0.8"x0.4"
INPUT SPECIFICATIONS			ENVIRONMENT SPECIFICATIONS	
Input Voltage Range		See table	Operating Temperature	-40°C~85°C(See Derating Curve) -40°C ~ +70°C (For 100% load)
Under Voltage Lockout			Maximum Case Temperature	100°C
24V Models	Module ON / OFF	8.5Vdc / 7.0Vdc, typ.	Storage Temperature	-55°C~125°C
48V Models	Module ON / OFF	16.5Vdc / 14.5Vdc, typ.	Cooling	Nature Convection
Start up Time		20mS, typ.		
(Nominal Vin and constant resistive load)				
Input Filter		Pi Type	ABSOLUTE MAXIMUM RATINGS(7)	
Input Current (No-Load)		See table, max.	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Current (Full-Load)		See table, typ.	Input Surge Voltage(100mS)	
Input Reflected Ripple Current (5)		20mApk-pk, typ.	24 Models	50 Vdc, max.
			48 Models	100 Vdc, max.
			Soldering Temperature	260C, max.
			(1.5mm from case 10 sec. max.)	
EMC SPECIFICATIONS				
Radiated Emissions	EN55022	CLASS A		
Conducted Emissions	EN55022	CLASS A		
ESD	IEC 61000-4-2	Perf. Criteria A		
RS	IEC 61000-4-3	Perf. Criteria A		
EFT	IEC 61000-4-4	Perf. Criteria A		
Surge(6)	IEC 61000-4-5	Perf. Criteria A		
CS	IEC 61000-4-6	Perf. Criteria A		
PFMF	IEC 61000-4-8	Perf. Criteria A		

SMK - 3W 4:1 Regulated Single & Dualoutput

PART NUMBER STRUCTURE

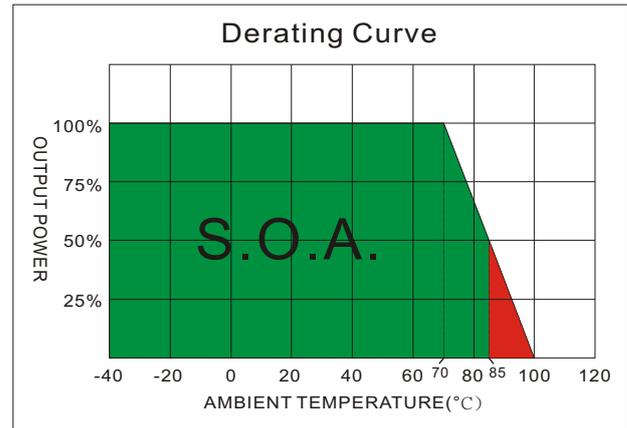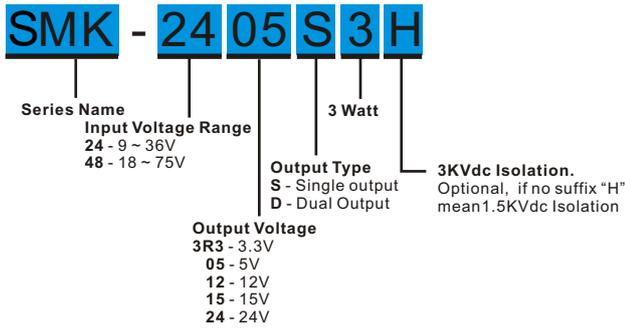

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
SMK-243R3S3	9-36	10	167	3.3	0	900	75	470
SMK-2405S3	9-36	10	160	5	0	600	79	470
SMK-2412S3	9-36	10	156	12	0	250	81	100
SMK-2415S3	9-36	10	154	15	0	200	82	100
SMK-2424S3	9-36	10	154	24	0	125	82	47
SMK-243R3D3	9-36	10	167	±3.3	0	±450	75	±220
SMK-2405D3	9-36	10	160	±5	0	±300	79	±220
SMK-2412D3	9-36	10	156	±12	0	±125	81	±100
SMK-2415D3	9-36	15	156	±15	0	±100	81	±100
SMK-2424D3	9-36	20	159	±24	0	±63	80	±47
SMK-483R3S3	18-75	7	84	3.3	0	900	75	470
SMK-4805S3	18-75	7	80	5	0	600	79	470
SMK-4812S3	18-75	7	78	12	0	250	81	100
SMK-4815S3	18-75	7	77	15	0	200	82	100
SMK-4824S3	18-75	7	77	24	0	125	82	47
SMK-483R3D3	18-75	7	84	±3.3	0	±450	75	±220
SMK-4805D3	18-75	7	78	±5	0	±300	81	±220
SMK-4812D3	18-75	7	78	±12	0	±125	81	±100
SMK-4815D3	18-75	7	78	±15	0	±100	81	±100
SMK-4824D3	18-75	10	81	±24	0	±63	79	±47

Suffix "H" means 3000Vdc isolation


NOTE

- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Ripple/Noise measured with a 1uF ceramic capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
- An external filter capacitor is required if the module has to meet IEC61000-4-5. The filter capacitor SCHMID-M suggest: Nippon chemi-con KY series, 220uF/100V
- Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

TEST CONFIGURATIONS


Output Ripple & Noise Measurement Test

Use a capacitor Cout(1.0uF) measurement.
The Scope measurement bandwidth is 0-20MHz.



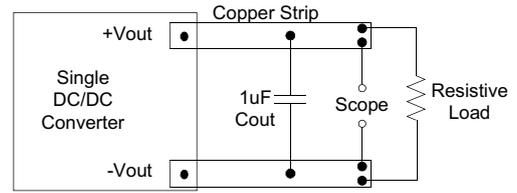


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor Lin(12uH) and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

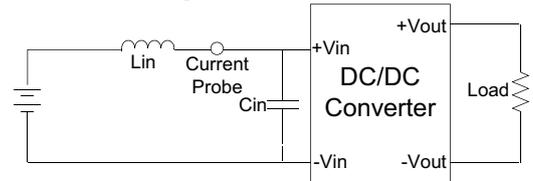

MECHANICAL SPECIFICATIONS

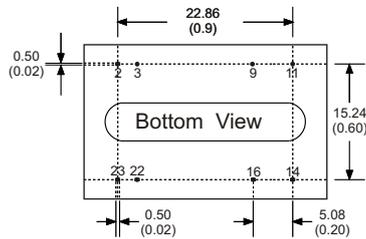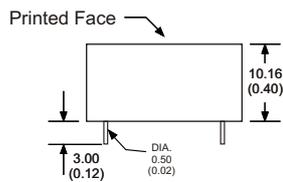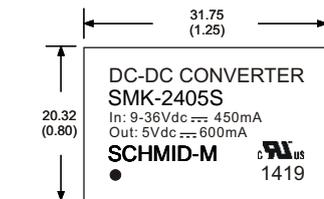

24 Pin DIL Package
Non-Conductive Plastic

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Case Tolerance: ±0.5 (±0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)