


# SCHMID-M

## SRBW Series

3W 4:1 Regulated Single & Dual output

### Features

- 8 Pin SIL
- Wide 4:1 Input Range
- Full SMD Technology
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 82%
- -40 ~ 71°C Operation Temperature Range
- Remote on/off Control



The SRBW series is a family of cost effective and high performed 3W single & dual output DC-DC converters. These converters are built in non-conductive black plastic package in a 8-pin SIL miniature compact case with high performance features wide range devices operate over 4:1 input voltage range providing stable output voltage which is much smaller than package of DIL 24- Same power rating but only 43% of the traditional volume. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24, 48 with output voltage of 3.3, 5, 12, 15,  $\pm 5$ ,  $\pm 12$ ,  $\pm 15$  Vdc. High performance features include high efficiency operation up to 82% and output voltage accuracy of  $\pm 1\%$  maximum.

All specifications typical at  $T_a=25^\circ\text{C}$ , nominal input voltage and full load unless otherwise specified

| OUTPUT SPECIFICATIONS                                       |   | PHYSICAL SPECIFICATIONS  |  |
|---|---|--|--|
| Voltage Accuracy  | $\pm 1\%$   | Case Material  | Non conductive black plastic               |
| Maximun Output Current                                      | See table   | Potting Material   | Silicon (UL94V-0 rated)                    |
| Line Regulation   | $\pm 0.2\%$ , max.  | Pin Material   | C5191R-H Solder-coated                     |
| Load Regulation   | Single (From 0% to 100% Load) $\pm 1.0\%$ , max.<br>Dual (From 10% to 100% Load) $\pm 1.0\%$ , max. | Weight   | 4.8g, typ.                                 |
| Cross Regulation (Dual Output) (1)                          | $\pm 5\%$   | Dimensions   | 0.86"x0.36"x0.44"                          |
| Ripple & Noise (20 Mhz bandwidth)(2)                        | 30mVpp, max.  | ENVIRONMENT SPECIFICATIONS   |  |
| Short Circuit Protection                                    | Indefinite (Automatic Recovery)   | Operating Temperature  | $-40^\circ\text{C} \sim 71^\circ\text{C}$  |
| Temperature Coefficient                                     | $\pm 0.02\%/^\circ\text{C}$   | Maximum Case Temperature   | $100^\circ\text{C}$                        |
| Capacitive Load(3)  | See table   | Storage Temperature  | $-40^\circ\text{C} \sim 125^\circ\text{C}$ |
| Transient Recovery Time(4)                                  | 250us, typ.   | Cooling  | Nature Convection                          |
| Transient Response Deviation(4)                             | $\pm 3\%$ , max.  | ABSOLUTE MAXIMUM RATINGS(6)  |  |
| INPUT SPECIFICATIONS  |   | These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. |  |
| Voltage Range   | See table   | Input Surge Voltage(100ms max.)  |  |
| Start up Time(Nominal $V_{in}$ and constant resistive load) | 30mS, typ.  | 12 Models  | 25Vdc, max.                                |
| Max. Input Current  | See table   | 24 Models  | 50Vdc, max.                                |
| No-Load Input Current                                       | See table   | 48 Models  | 100Vdc, max.                               |
| Input Filter  | Capacitor   | Soldering Temperature  | $260^\circ\text{C}$ max.                   |
| Input Reflected Ripple Current(5)                           | 20mA pk-pk  | (1.5mm from case 10sec. max.)  |  |
| Remote on/off   |   | EMC SPECIFICATIONS   |  |
| ON:   | open or high impedance  | Radiated Emissions   | EN55022 CLASS A                            |
| OFF:  | 2-4mA input current (via 1K)  | Conducted Emissions (7)  | EN55022 CLASS A                            |
| Off stand by input current(Nominal $V_{in}$ )               | 2.5mA, max.   | ESD  | IEC 61000-4-2 Perf. Criteria A             |
| GENERAL SPECIFICATIONS                                      |   | RS   | IEC 61000-4-3 Perf. Criteria A             |
| Efficiency  | See table, typ.   | EFT (8)  | IEC 61000-4-4 Perf. Criteria A             |
| I/O Isolation Voltage (tested for 3 sec)                    | 1600Vdc   | Surge (8)  | IEC 61000-4-5 Perf. Criteria A             |
| I/O Isolation Capacity                                      | 200 pF, max.  | CS   | IEC 61000-4-6 Perf. Criteria A             |
| I/O Isolation Resistance                                    | 1000M Ohm, min.   | PFMF   | IEC 61000-4-8 Perf. Criteria A             |
| Switching Frequency   | 100kHz, min.  |  |  |
| Humidity  | 95%reIH   |  |  |
| Reliability Calculated MTBF (MIL-HDBK-217 F)                | $> 1.7$ Mhrs@ $25^\circ\text{C}$  |  |  |
| Safety Standard(designed to meet)                           | IEC60950-1  |  |  |

## SRBW - 3W 4:1 Regulated Single & Dual output

### PART NUMBER STRUCTURE

**SRBW** - **24** **05** **SD** **3**


Series Name  
W:wide range

Input Voltage Range  
12 - 4.5 ~ 18V  
24 - 9 ~ 36V  
48 - 18 ~ 75V

Case Type  
S - SIP Single Output  
SD - SIP Dual Output

Nominal Output Voltage  
3R3 - 3.3V  
05 - 5V  
12 - 12V  
15 - 15V

Watt

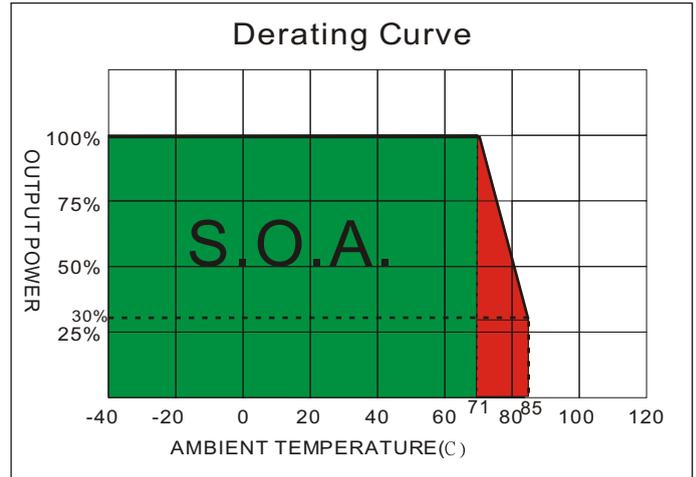

### MODEL SELECTION GUIDE

| MODEL NUMBER | INPUT Voltage Range (Vdc) | INPUT Current |                | OUTPUT Voltage (Vdc) | OUTPUT Current |                | EFFICIENCY @FL (%) | Capacitor Load (uF) |
|--------------|---------------------------|---------------|----------------|----------------------|----------------|----------------|--------------------|---------------------|
|              |                           | No-Load (mA)  | Full Load (mA) |                      | Min. load (mA) | Full load (mA) |                    |                     |
| SRBW-123R3S3 | 4.5-18                    | 40            | 268            | 3.3                  | 0              | 700            | 72                 | 1760uF              |
| SRBW-1205S3  | 4.5-18                    | 40            | 325            | 5                    | 0              | 600            | 77                 | 1000uF              |
| SRBW-1212S3  | 4.5-18                    | 40            | 309            | 12                   | 0              | 250            | 81                 | 170uF               |
| SRBW-1215S3  | 4.5-18                    | 40            | 309            | 15                   | 0              | 200            | 81                 | 110uF               |
| SRBW-1205SD3 | 4.5-18                    | 40            | 325            | ±5                   | 0              | ±300           | 77                 | ±470uF              |
| SRBW-1212SD3 | 4.5-18                    | 40            | 313            | ±12                  | 0              | ±125           | 80                 | ±100uF              |
| SRBW-1215SD3 | 4.5-18                    | 40            | 313            | ±15                  | 0              | ±100           | 80                 | ±47uF               |
| SRBW-243R3S3 | 9-36                      | 25            | 129            | 3.3                  | 0              | 700            | 75                 | 1760uF              |
| SRBW-2405S3  | 9-36                      | 25            | 159            | 5                    | 0              | 600            | 79                 | 1000uF              |
| SRBW-2412S3  | 9-36                      | 30            | 153            | 12                   | 0              | 250            | 82                 | 170uF               |
| SRBW-2415S3  | 9-36                      | 30            | 153            | 15                   | 0              | 200            | 82                 | 110uF               |
| SRBW-2405SD3 | 9-36                      | 30            | 159            | ±5                   | 0              | ±300           | 79                 | ±470uF              |
| SRBW-2412SD3 | 9-36                      | 35            | 159            | ±12                  | 0              | ±125           | 79                 | ±100uF              |
| SRBW-2415SD3 | 9-36                      | 35            | 157            | ±15                  | 0              | ±100           | 80                 | ±47uF               |
| SRBW-483R3S3 | 18-75                     | 15            | 66             | 3.3                  | 0              | 700            | 74                 | 1760uF              |
| SRBW-4805S3  | 18-75                     | 15            | 81             | 5                    | 0              | 600            | 78                 | 1000uF              |
| SRBW-4812S3  | 18-75                     | 15            | 79             | 12                   | 0              | 250            | 80                 | 170uF               |
| SRBW-4815S3  | 18-75                     | 15            | 78             | 15                   | 0              | 200            | 81                 | 110uF               |
| SRBW-4805SD3 | 18-75                     | 15            | 80             | ±5                   | 0              | ±300           | 79                 | ±470uF              |
| SRBW-4812SD3 | 18-75                     | 15            | 80             | ±12                  | 0              | ±125           | 79                 | ±100uF              |
| SRBW-4815SD3 | 18-75                     | 15            | 80             | ±15                  | 0              | ±100           | 79                 | ±47uF               |


### NOTE

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Measured with a 1uF ceramic capacitor.
3. Test by minimal Vin and constant resistive load.
4. Test by normal Vin and 100%-25% load, 25% load step change.
5. Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
6. Exceeding the absolute ratings of the unit could cause damage. It's not allowed for continuous operating ratings.
7. Input filter components are required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
8. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.  
The filter capacitor SCHMID-M suggest: Nippon - chemi - con KY series, 220uF/100V.

TEST CONFIGURATIONS


**Input Reflected Ripple Current Test Step**

Input reflected ripple current is measured through a source inductor  $L_{in}$  (12 $\mu$ H) and a source capacitor  $C_{in}$  (47 $\mu$ F, ESR<1.0 $\Omega$  at 100KHz) at nominal input and full load.

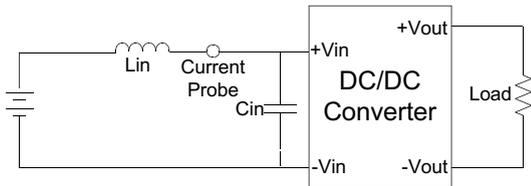


**Output Ripple & Noise Measurement Test**

Use a capacitor  $C_{out}$  (1.0 $\mu$ F) measurement. The Scope measurement bandwidth is 0-20MHz.

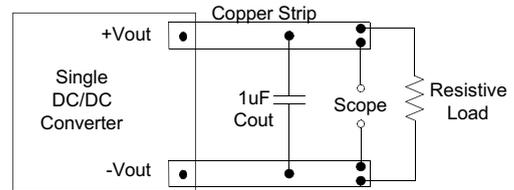


**EMI Filter**


Input filter components ( $C_1$ ,  $L$ ) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

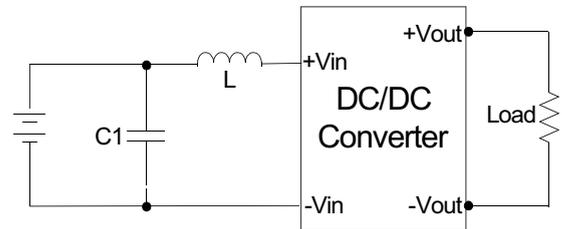

|               | C1                    | L           |
|---------------|-----------------------|-------------|
| SRBW-12XXXXXX | 1210 10 $\mu$ F/35V   | 2.5 $\mu$ H |
| SRBW-24XXXXXX | 1210 2.2 $\mu$ F/100V | 10 $\mu$ H  |
| SRBW-48XXXXXX | 1210 2.2 $\mu$ F/100V | 18 $\mu$ H  |

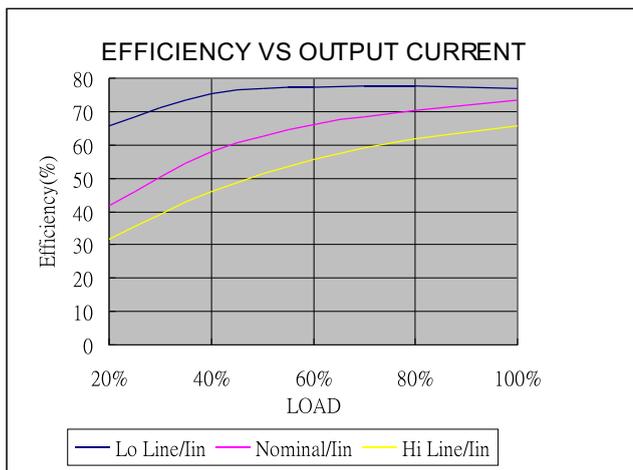


SRBW-123R3S3

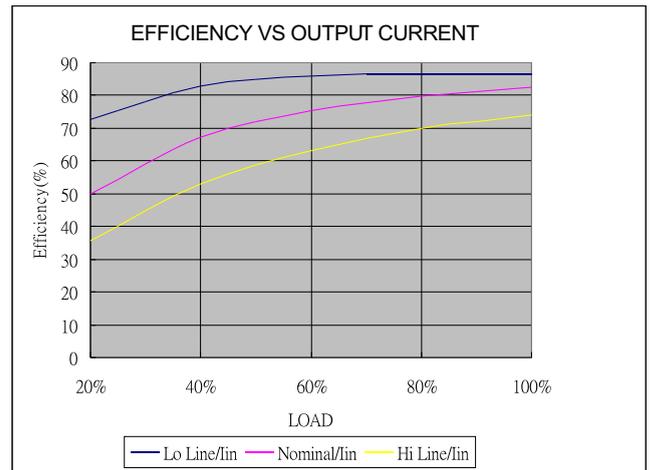

SRBW-4815S3

MECHANICAL SPECIFICATIONS

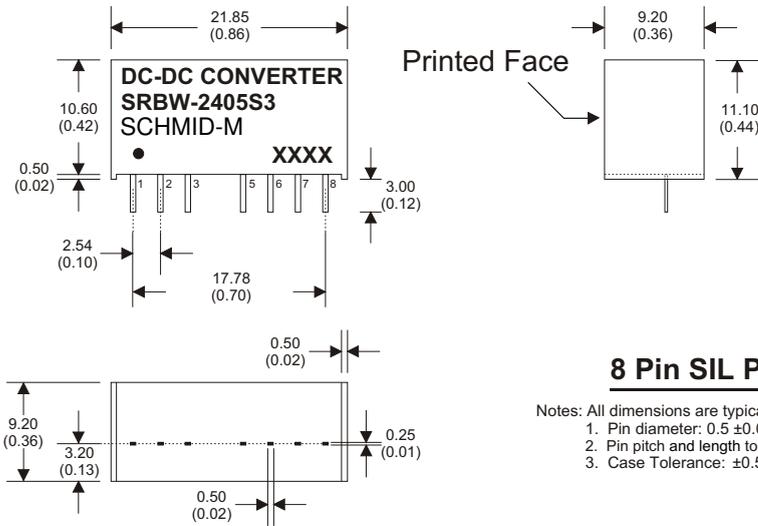

**8 Pin SIL Package**

- Notes: All dimensions are typical in millimeters ( inches ).
1. Pin diameter:  $0.5 \pm 0.05$  (  $0.02 \pm 0.002$  )
  2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
  3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )

| PIN CONNECTIONS |               |               |
|-----------------|---------------|---------------|
| PIN NUMBER      | SINGLE        | DUAL          |
| 1               | -V Input      | -V Input      |
| 2               | +V Input      | +V Input      |
| 3               | Remote On/Off | Remote On/Off |
| 5               | N.C.          | N.C.          |
| 6               | +V Output     | +V Output     |
| 7               | -V Output     | Common        |
| 8               | N.C.          | -V Output     |