

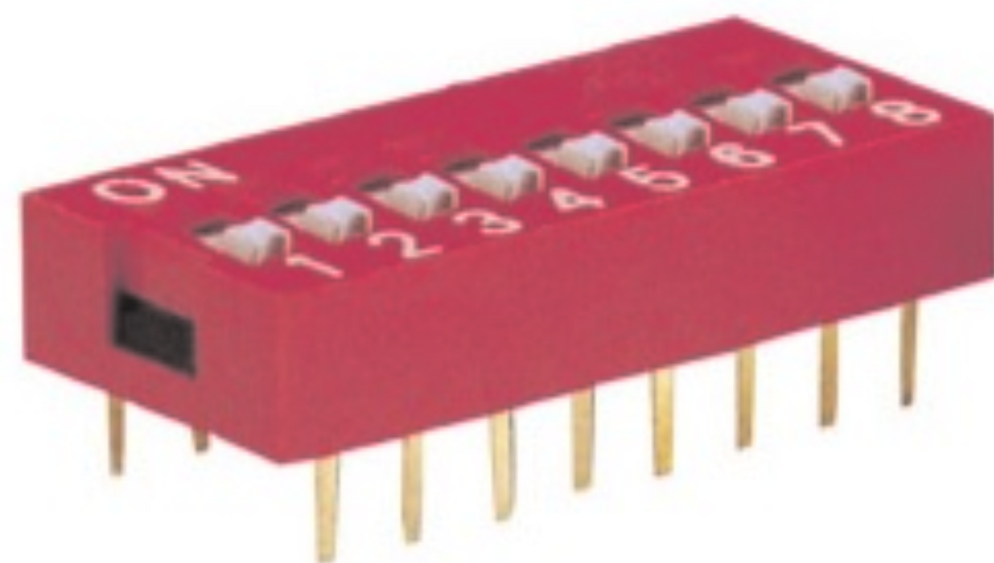


MODEL NO.	NO. POS	A
DS-01	1	4.10
DS-02	2	6.64
DS-03	3	9.18
DS-04	4	11.72
DS-05	5	14.26
DS-06	6	16.80
DS-07	7	19.34
DS-08	8	21.88
DS-09	9	24.42
DS-10	10	26.96
DS-12	12	32.04

Schematic(TYP.)

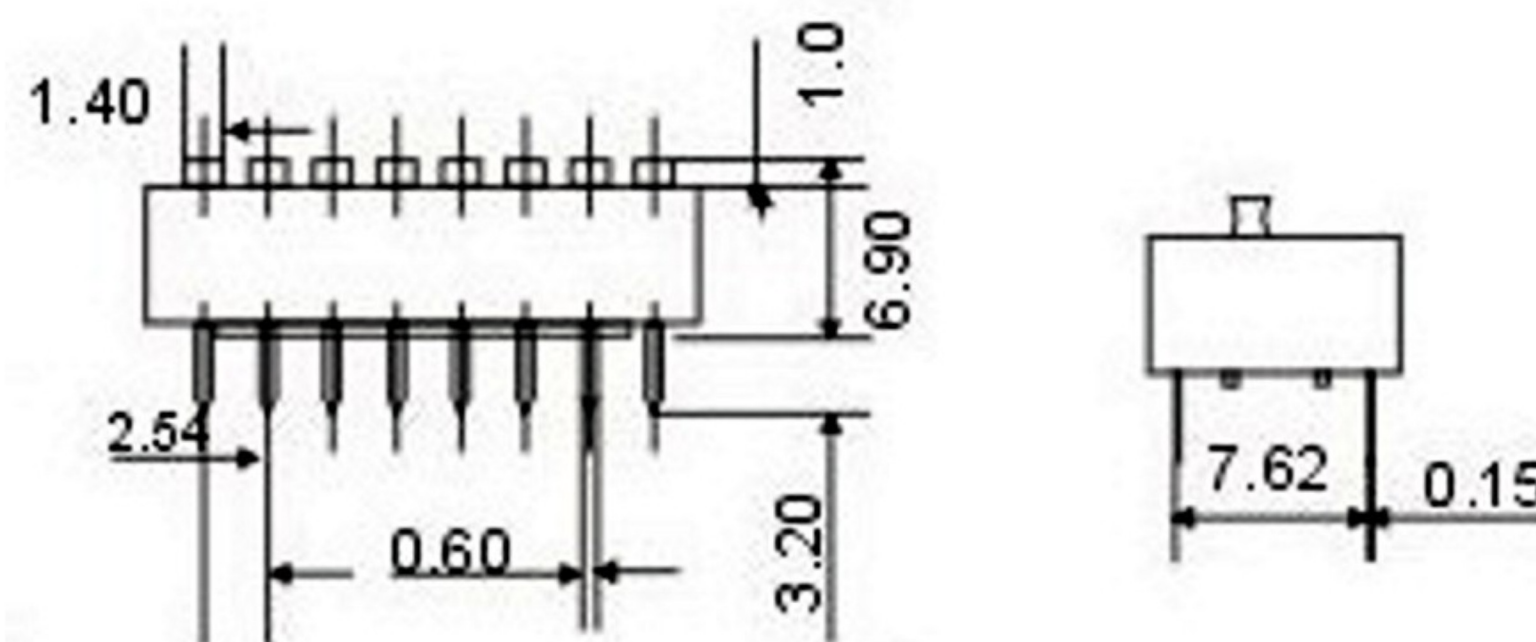

Mechanical Life: 2000 operations per switch
 Operation Force: 1000 gf max.
 Stroke: 2.0mm
 Operation Temp: -20°C to +70°C
 Electrical Life: 2000 operations per switch-24 VDC, 25mA
 Contact Resistance: 50m max. At initial
 Non-Switching Rating: 100mA, 50VDC
 Switching Rating: 25mA, 24VDC
 Circuit: Single pole single throw

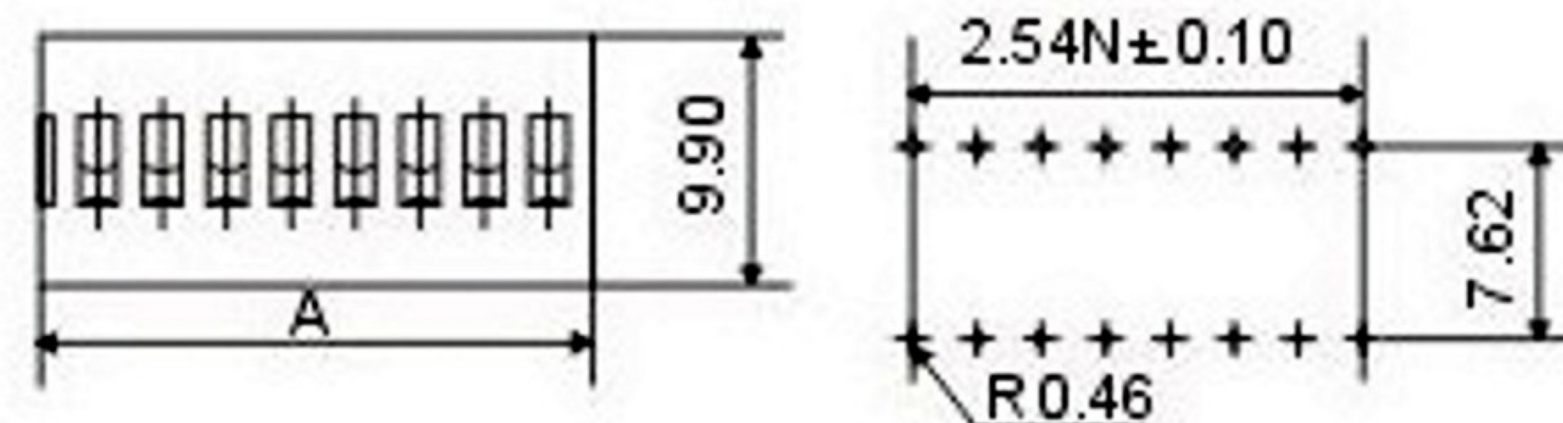

RoHS
Compliant

SCHMID-M

APPD.		TOLERANCE	PART NAME
DWG. HELEN	SCALE	.0 ± 0.38 .00 ± 0.25 ANG. ± 3°	DIP Switches DS Series
DATE	UNIT M M	SIZE. A 4	PART NO.
2011/5/31	PAGE 1 OF 1	REV. A	SM-DS-DS-XX