



MODEL NO.	NO. POS	A
DA-01	1	4.10
DA-02	2	6.64
DA-03	3	9.18
DA-04	4	11.72
DA-05	5	14.26
DA-06	6	16.80
DA-07	7	19.34
DA-08	8	21.88
DA-09	9	24.42
DA-10	10	26.96
DA-12	12	32.04

Schematic(TYP.)

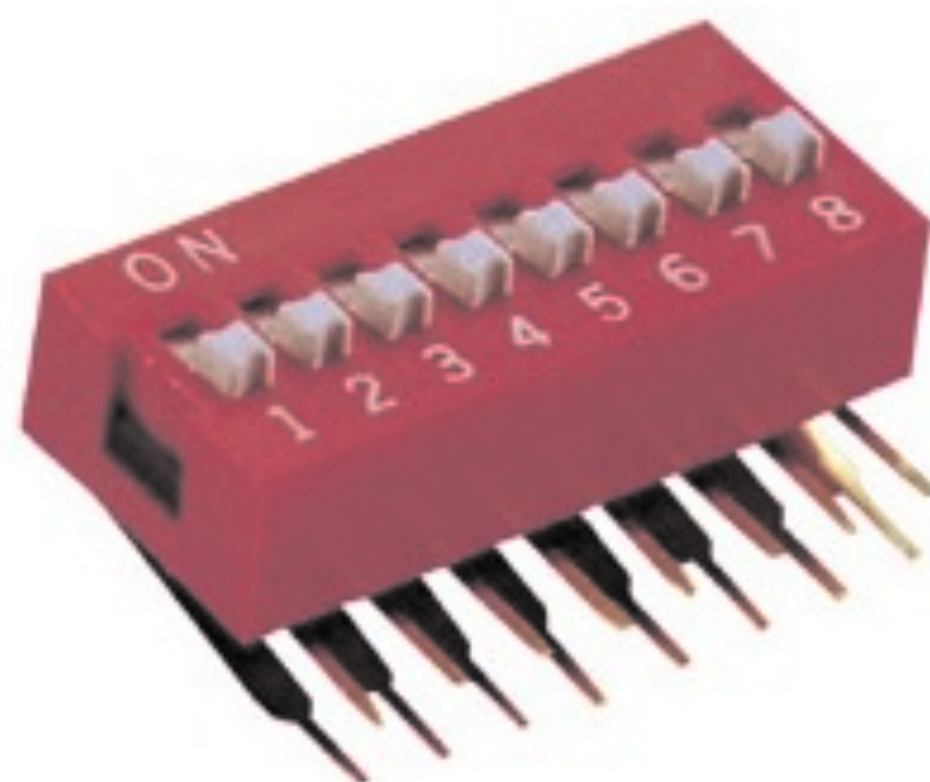


Mechanical Life: 2000 operations per switch
 Operation Force: 1000 gf max.
 Stroke: 2.0mm
 Operation Temp: -20°C to +70°C
 Electrical Life: 2000 operations per switch-24 VDC, 25mA
 Contact Resistance: 50m max. At initial
 Non-Switching Rating: 100mA, 50VDC
 Switching Rating: 25mA, 24VDC
 Circuit: Single pole single throw

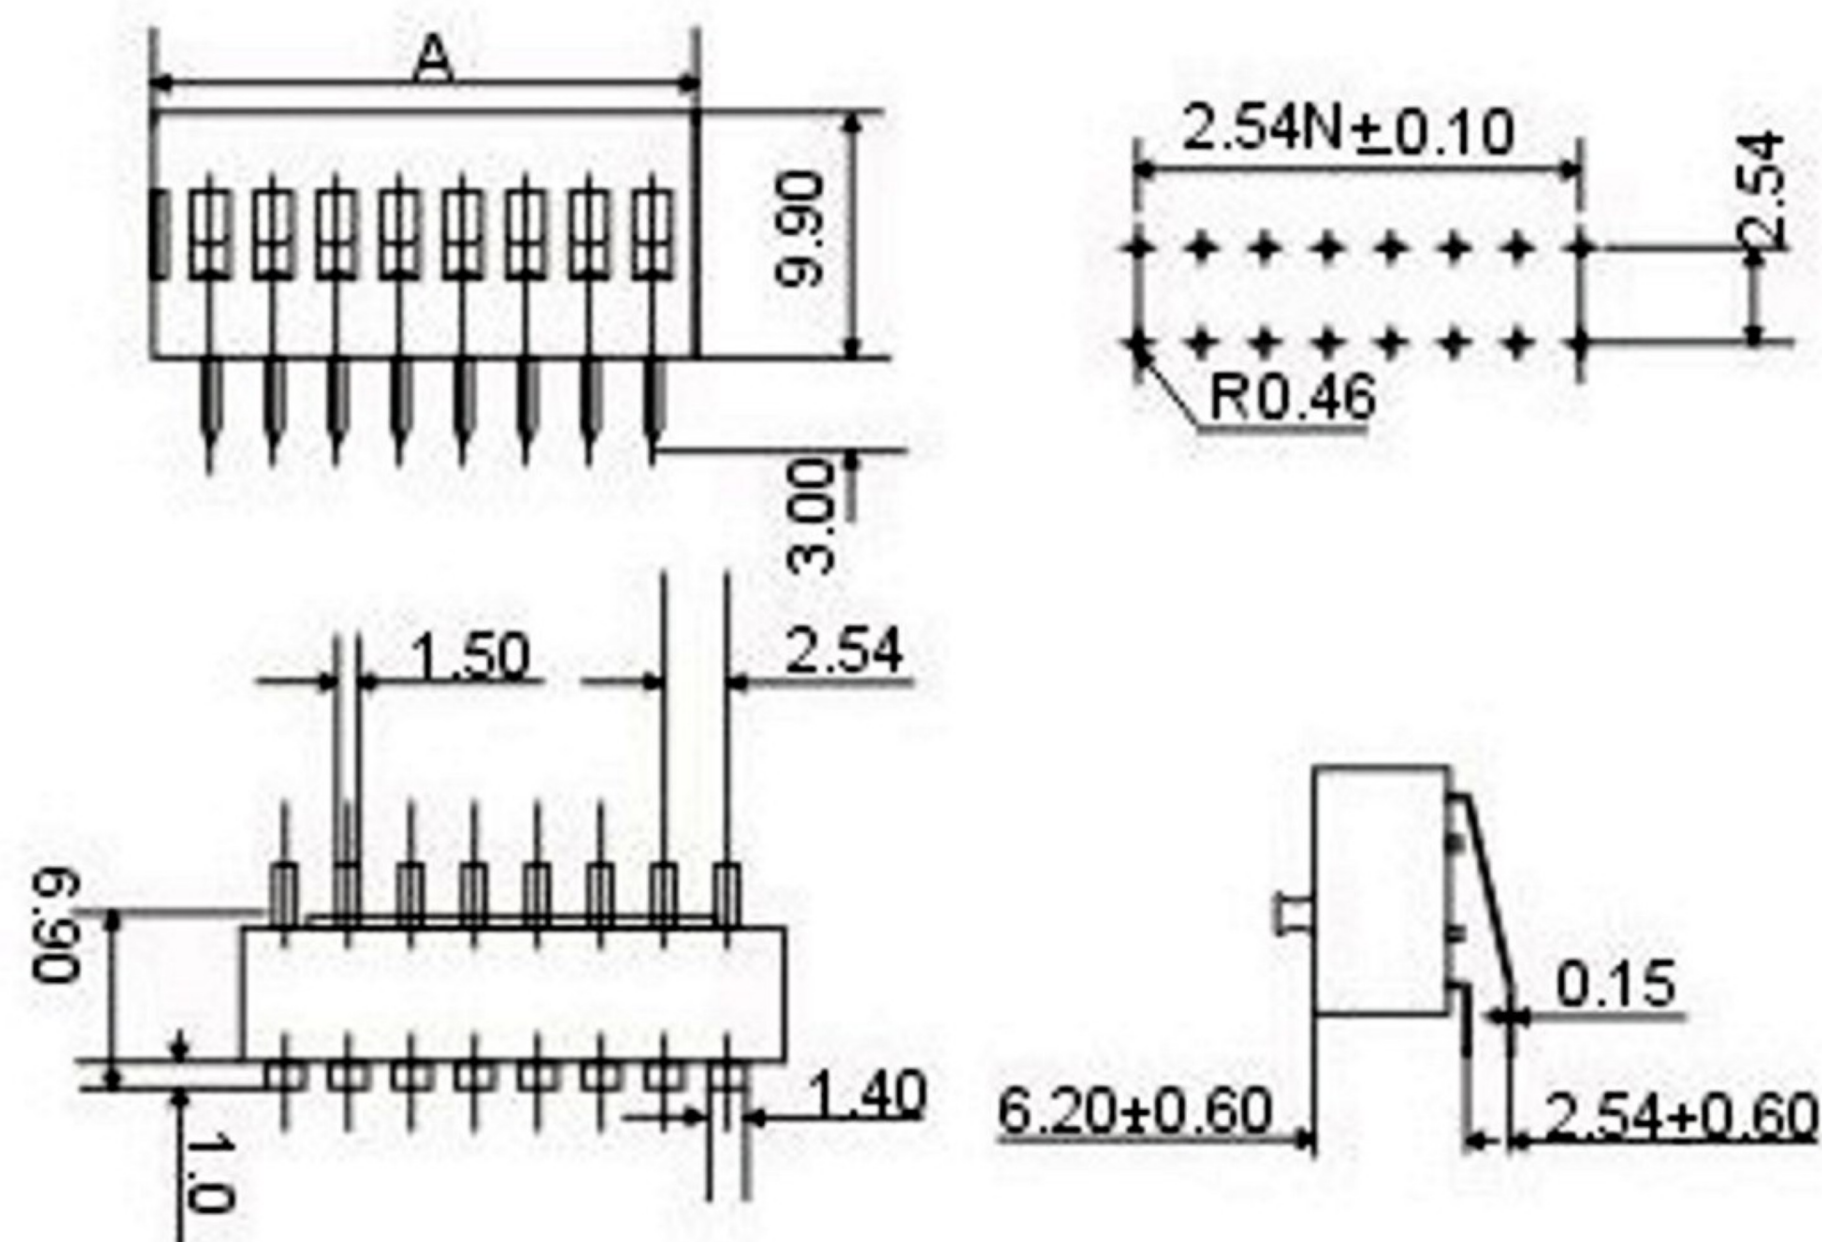

RoHS
Compliant

SCHMID-M

APPD.



TOLERANCE

PART NAME

DWG.

HELEN

SCALE

.0 ± 0.38
.00 ± 0.25
ANG. ± 3°

DIP Switches DA Series

DATE

2011/5/31

UNIT

M M

SIZE.

A 4

PART NO.

SM-DS-DA-XX

PAGE

1 OF 1

REV.

A