

1 2 3 4 5 6 7 8

A

B

C

D

E



F

G

H

Model No.	No. Pos	A
DP-02	2	6,64
DP-04	4	11,72
DP-06	6	16,80
DP-08	8	21,88
DP-10	10	26,96
DP-12	12	32,04

Mechanical Life: 2000 operations per switch
Operation Force: 1000 gf max.
Stroke: 2.0mm
Operation Temp: -20°C to +70°C
Electrical Life: 2000 operations per switch-24 VDC, 25mA
Contact Resistance: 50m max. At initial
Non-Switching Rating: 100mA, 50VDC
Switching Rating: 25mA, 24VDC
Circuit: Single pole single throw

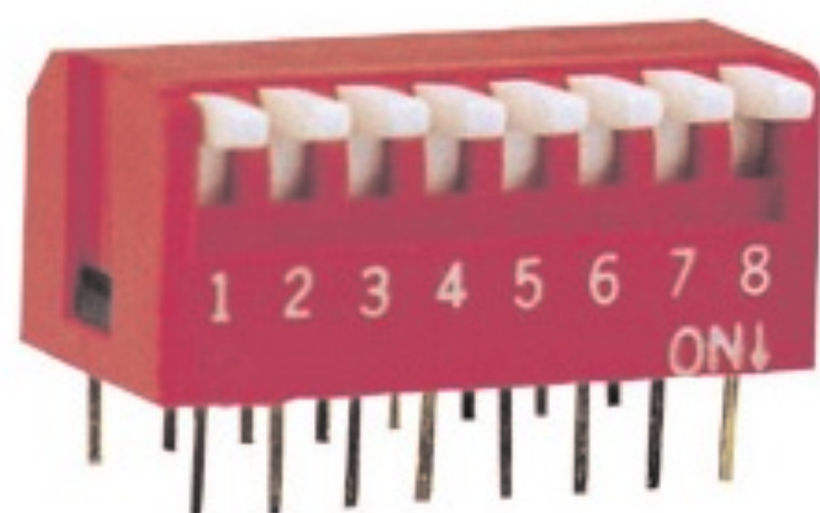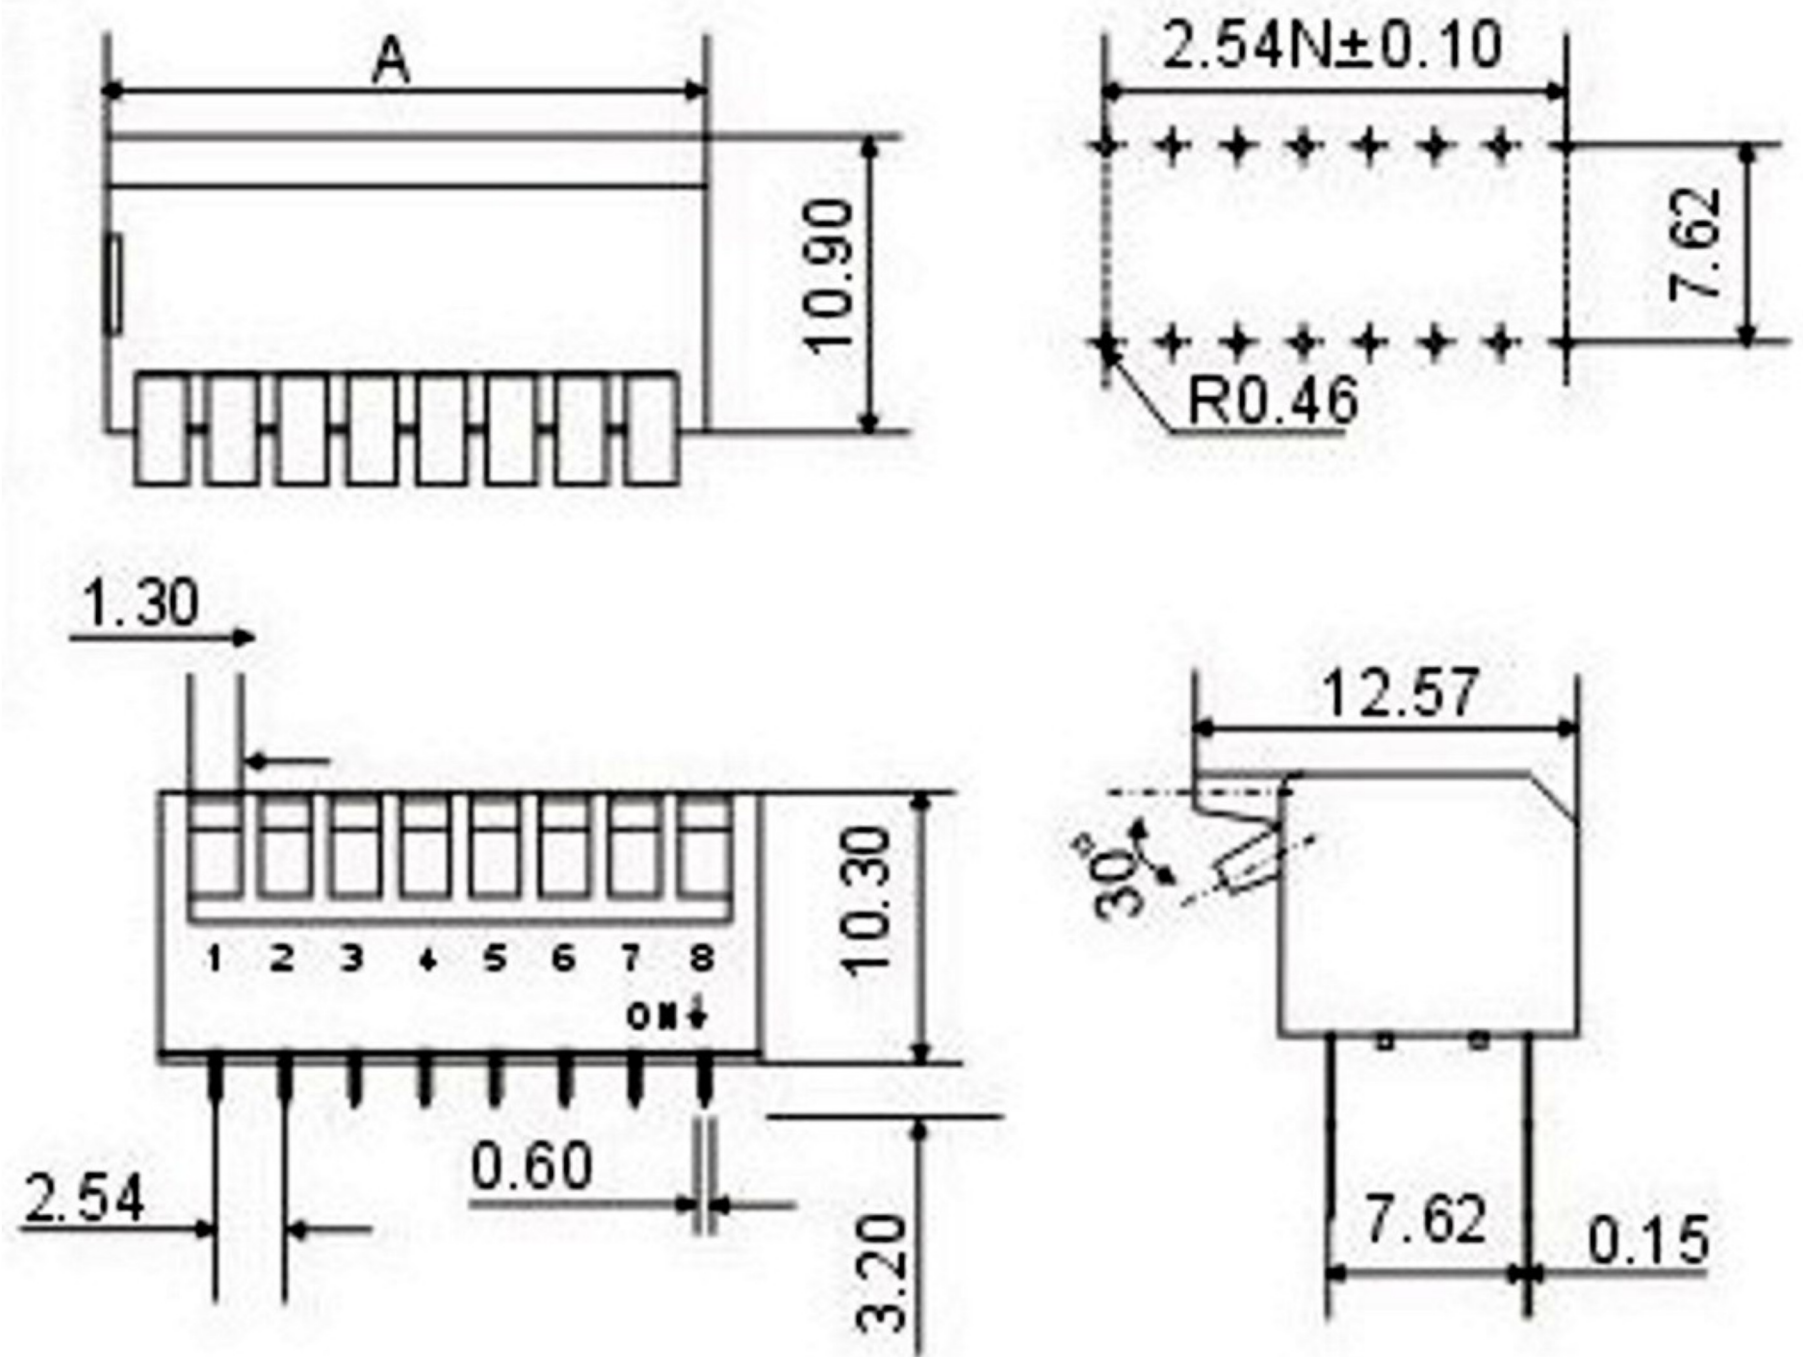

RoHS
Compliant

SCHMID-M

APPD.		TOLERANCE	PART NAME DIP Switches DP Series
DWG. HELEN		.0 ± 0.38 .00 ± 0.25 ANG. ± 3°	
DATE	UNIT M M	SIZE A 4	PART NO. SM-DS-DP-XX
2011/5/31	PAGE 1 OF 1	REV. A	

1 2 3 4 5 6 7 8