

12345678

A

A

B

B

C

C

D

D

E

E

F


F

G

G


H

H

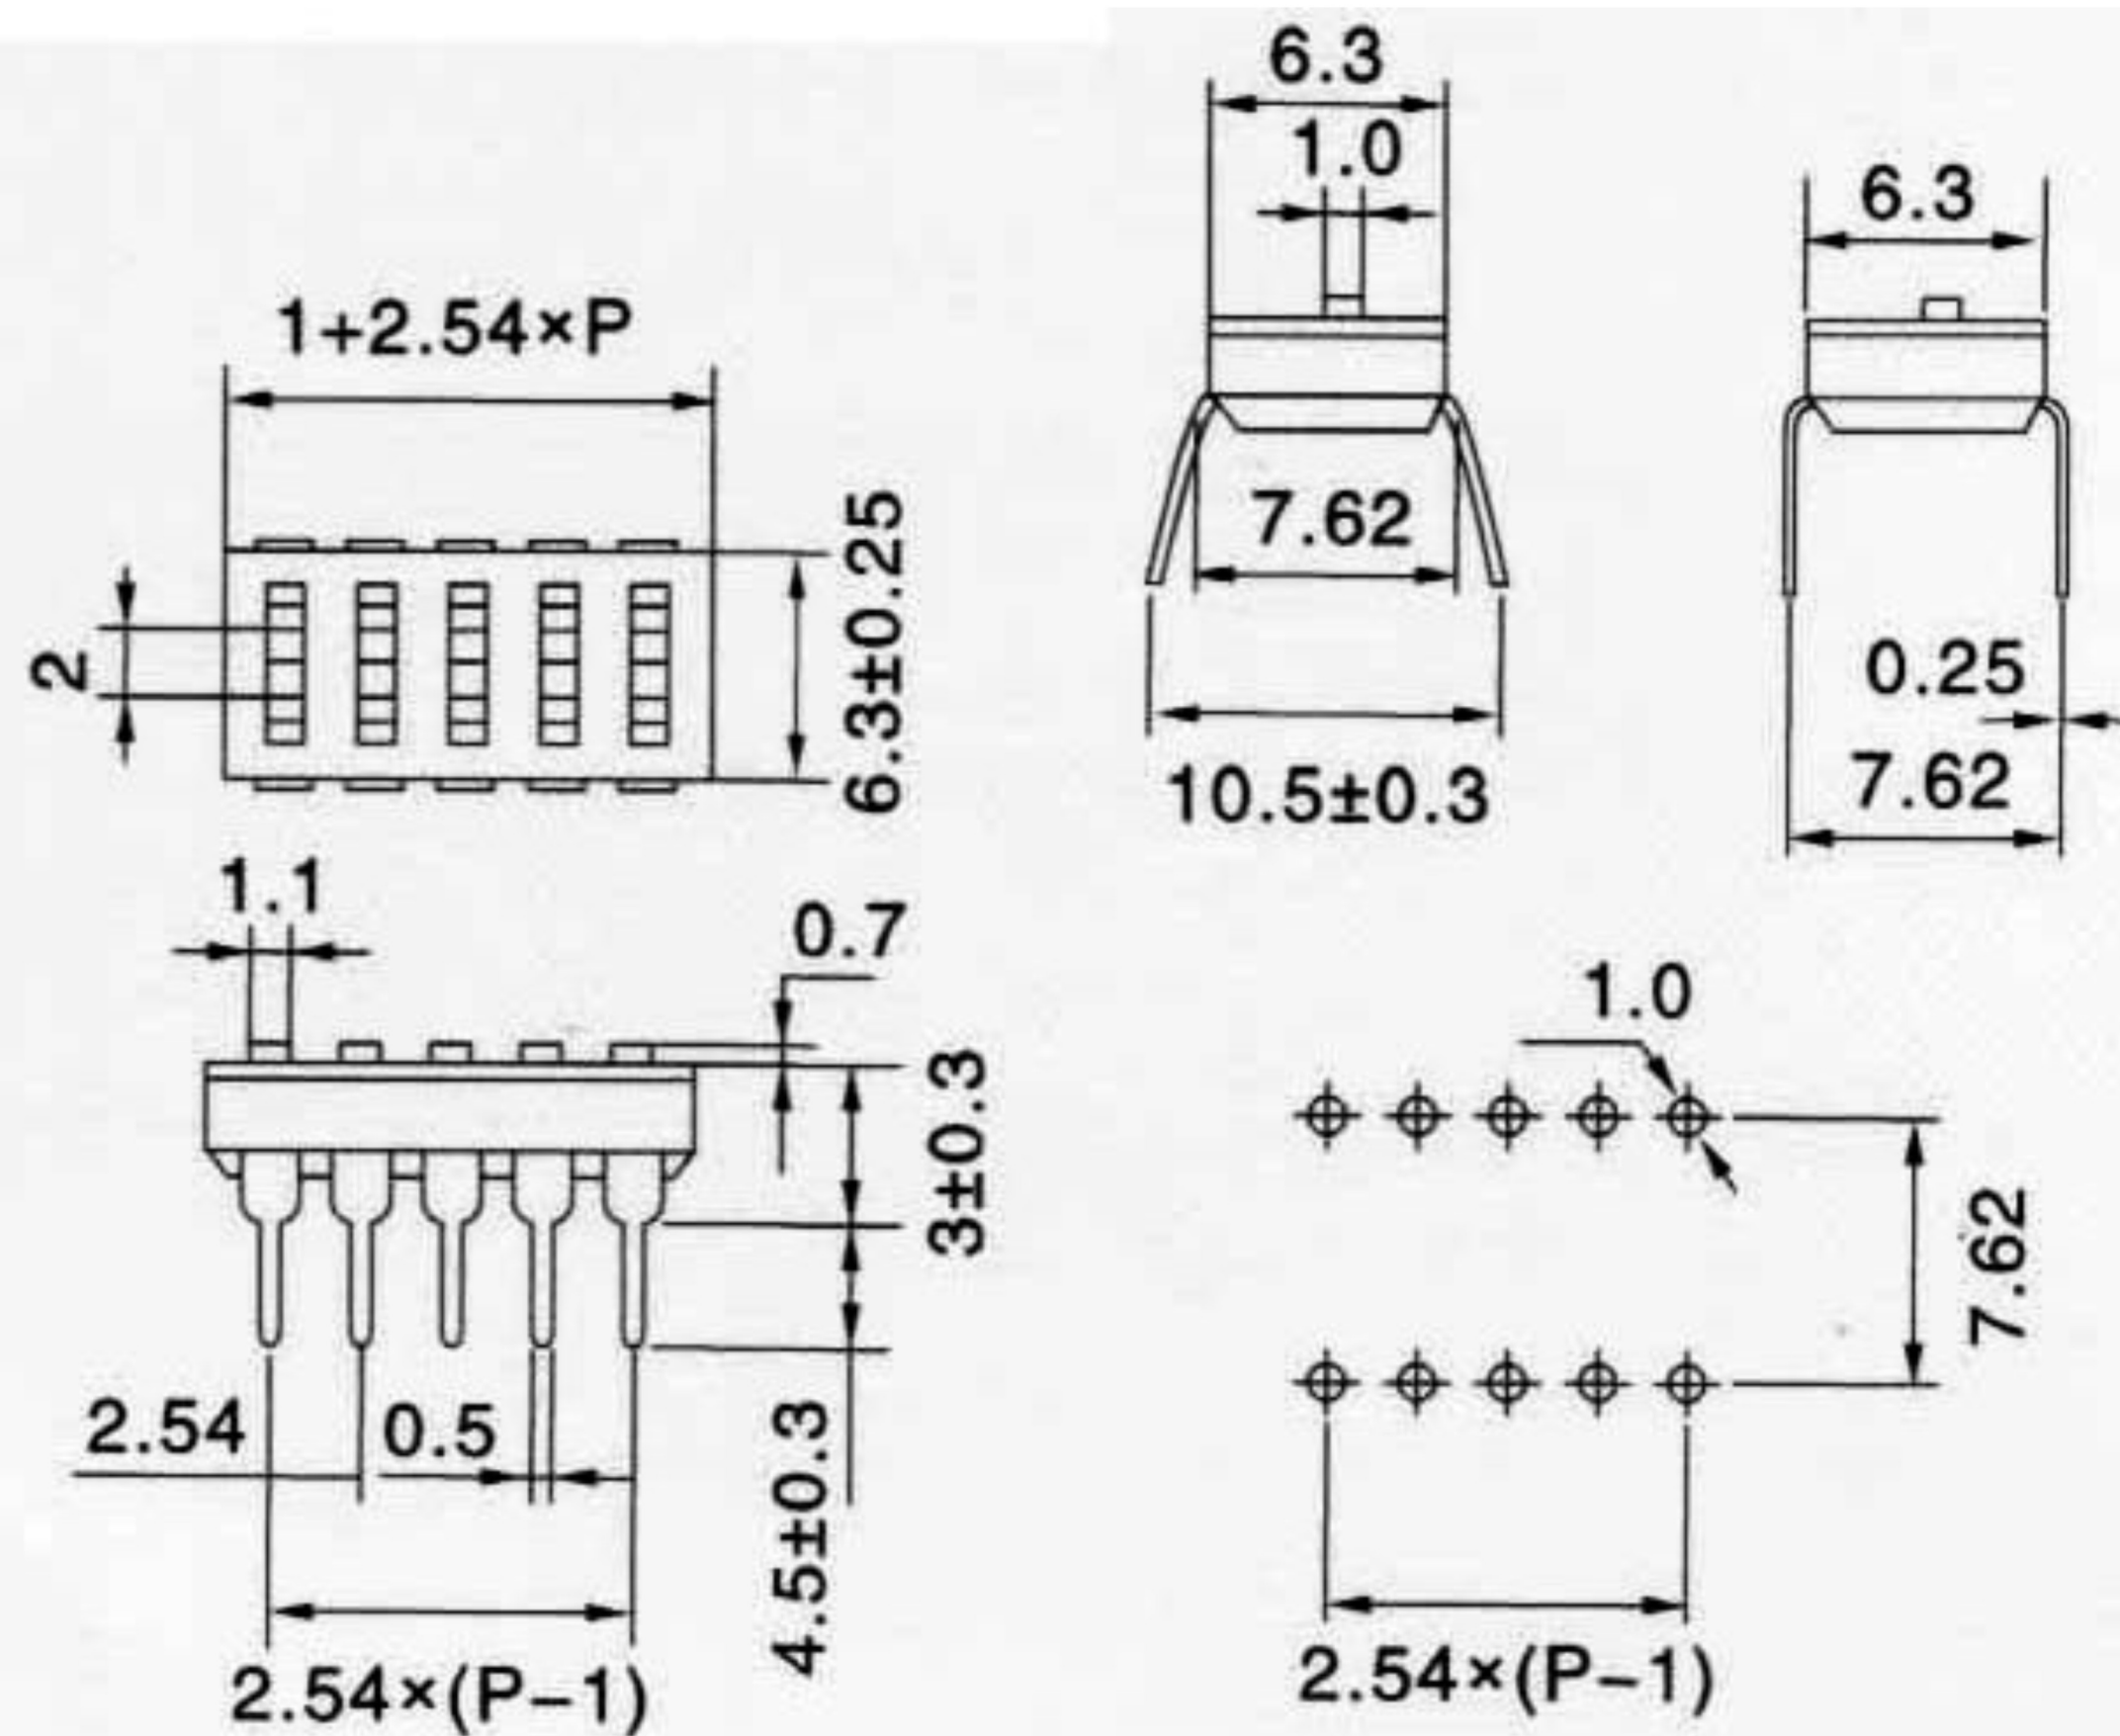

Operation Force: 8N Max
Stroke: 1.0mm
Operation Temp: -40°C to $+90^{\circ}\text{C}$
Storage Temp: -40°C to $+90^{\circ}\text{C}$
Electrical Life: 2000 operations cycles per switch
24VDC, 25mA
Non-switching Rating: 100mA, 50VDC
Switching rating: 25mA, 24VDC
Insulation Resistance: 100m Ohm, 500VDC


Dielectric Resistance: 50Hz 500VAC/1minute
Capacitance: 5pF max
Circuit: Single pole single throw

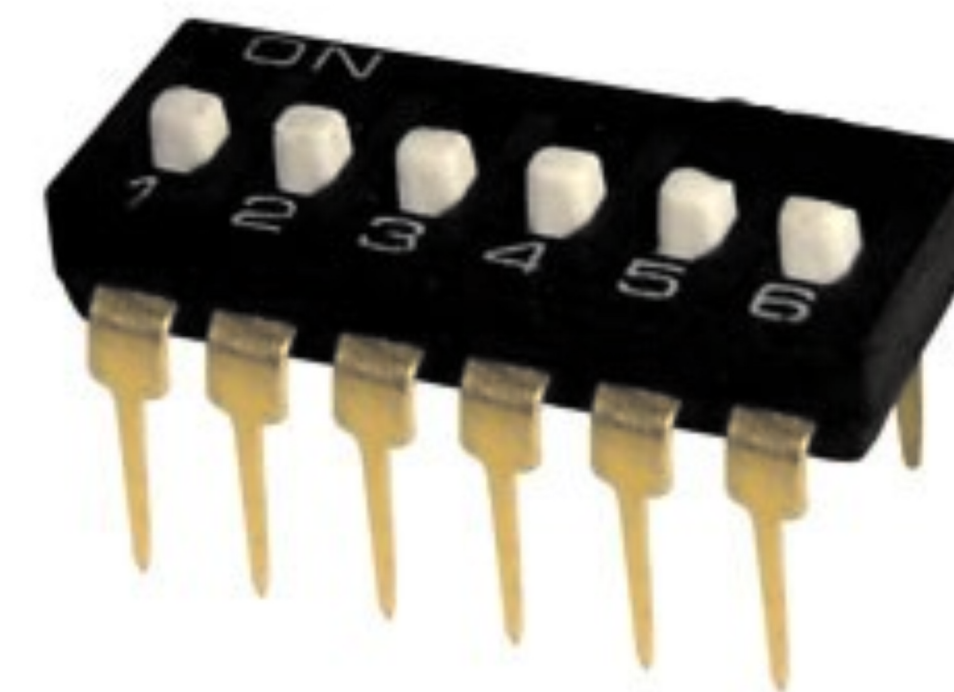

RoHS
Compliant

SCHMID-M

APPD.



TOLERANCE

PART NAME

DWG.

HELEN

SCALE

.0 $\pm$ 0.38
.00 $\pm$ 0.25
ANG. $\pm$ 3°

DIP Switches - Low Profile

DATE

2011/5/31

UNIT

M M

SIZE.

A 4

PART NO.

SM-DS-LP-DIL-05

PAGE

1 OF 1

REV.

A

12345678