
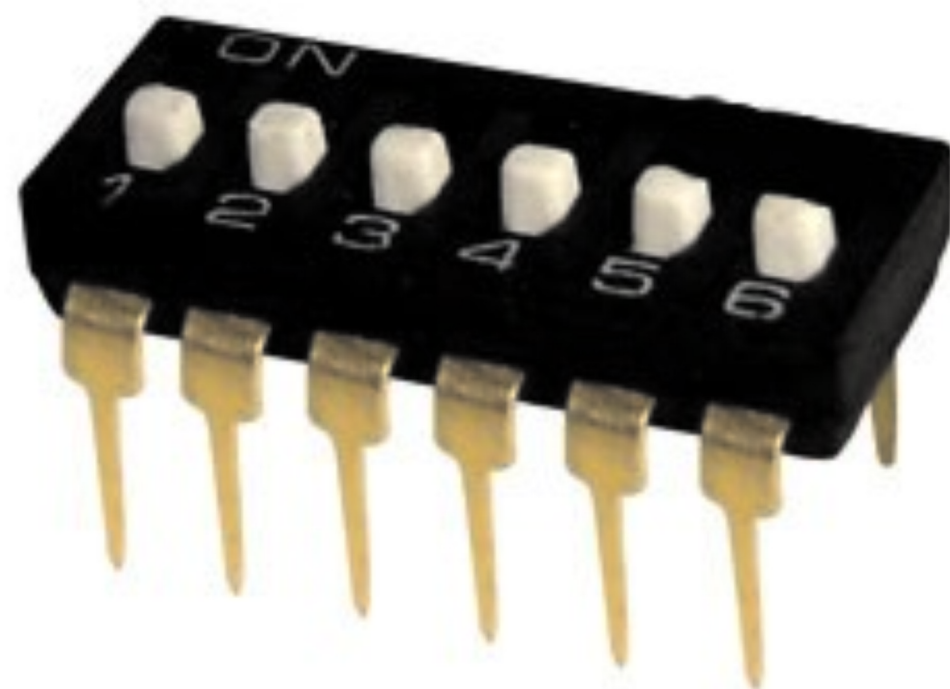


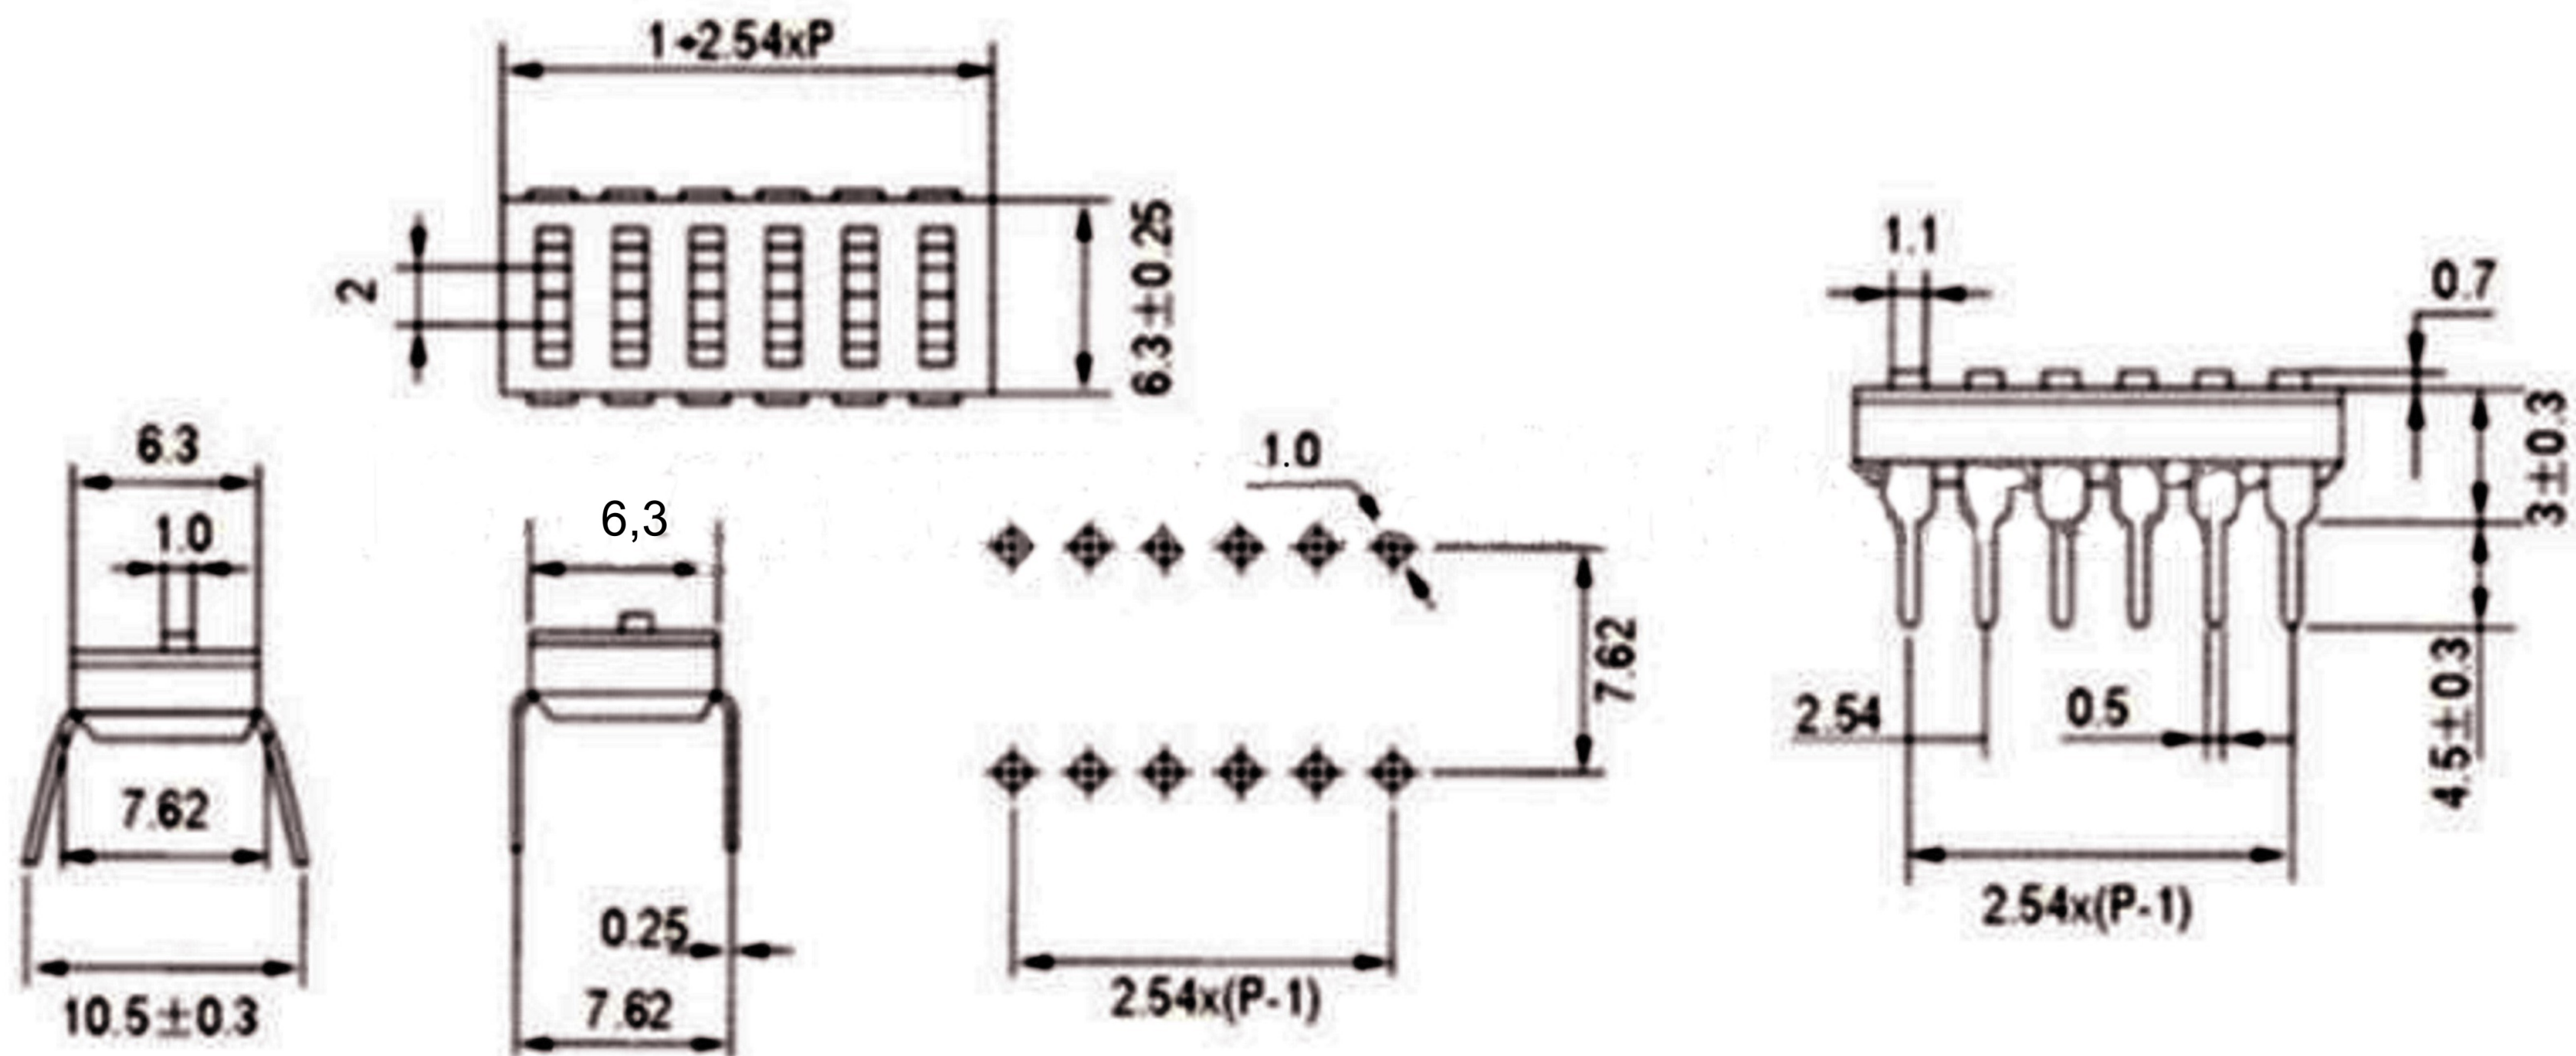


|                        |                                   |                        |                          |
|------------------------|-----------------------------------|------------------------|--------------------------|
| Operation Force:       | 8N Max                            | Dielectric Resistance: | 50Hz 500VAC/1minute      |
| Stroke:                | 1.0mm                             | Capacitance:           | 5pF max                  |
| Operation Temp:        | -40°C to +90°C                    | Circuit:               | Single pole single throw |
| Storage Temp:          | -40°C to +90°C                    |                        |                          |
| Electrical Life:       | 2000 operations cycles per switch |                        |                          |
|                        | 24VDC, 25mA                       |                        |                          |
| Non-switching Rating:  | 100mA, 50VDC                      |                        |                          |
| Switching rating:      | 25mA, 24VDC                       |                        |                          |
| Insulation Resistance: | 100m Ohm, 500VDC                  |                        |                          |

RoHS  
Compliant

**SCHMID-M**

APPD.



TOLERANCE

PART NAME

DWG.

HELEN

SCALE

.0  $\pm$  0.38  
.00  $\pm$  0.25  
ANG.  $\pm$  3°

DIP Switches - Low Profile

DATE

2011/5/31

UNIT

M M

SIZE.

A 4

PART NO.

SM-DS-LP-DIL-06

PAGE

1 OF 1

REV.

A