




Operation Force: 8N Max
 Stroke: 1.0mm
 Operation Temp: -40°C to +90°C
 Storage Temp: -40°C to +90°C
 Electrical Life: 2000 operations cycles per switch
 24VDC, 25mA

Dielectric Resistance: 50Hz 500VAC/1minute
 Capacitance: 5pF max
 Circuit: Single pole single throw

Non-switching Rating: 100mA, 50VDC
 Switching rating: 25mA, 24VDC
 Insulation Resistance: 100m Ohm, 500VDC

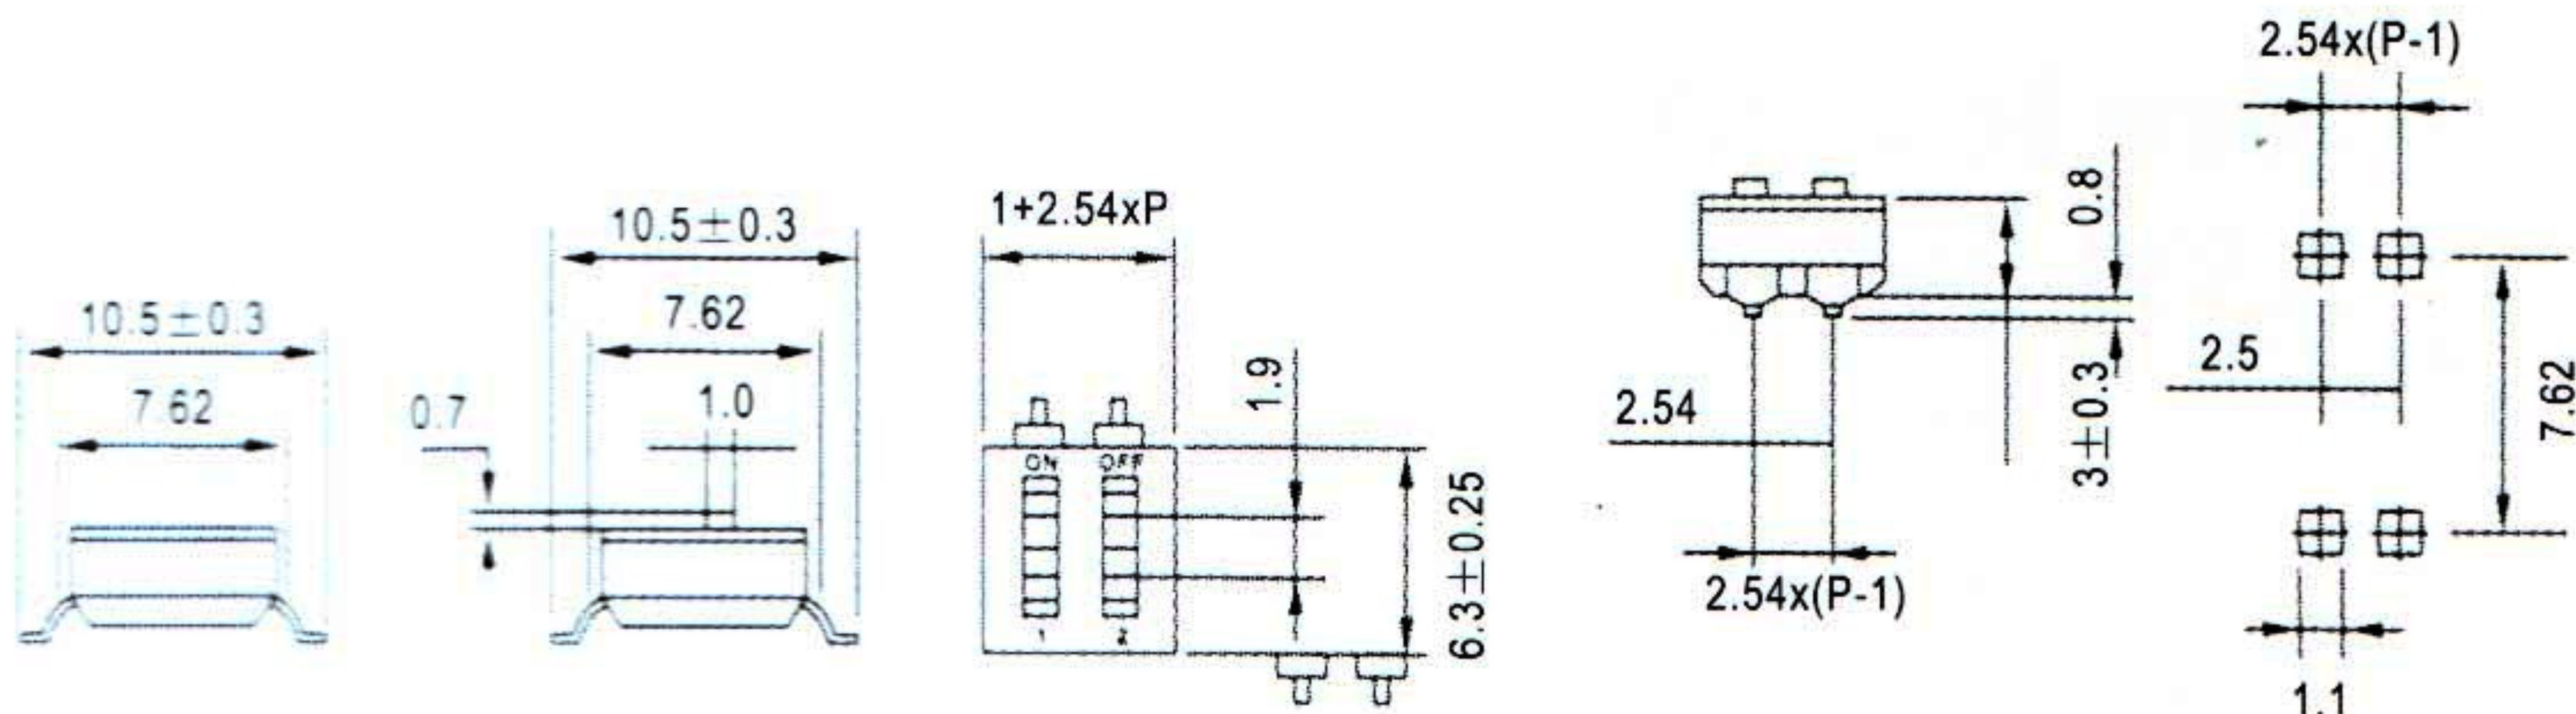

RoHS
Compliant

SCHMID-M

APPD.
 DWG. HELEN
 DATE 2011/5/31

TOLERANCE
 SCALE
 UNIT M M
 PAGE 1 OF 1
 SIZE. A 4
 REV. A

PART NAME
 DIP Switches - SMT
 PART NO.
 SM-DS-SMT-02