


	1	2	3	4	5	6	7	8
A								
B								
C								
D								
E								
F								
G								
H								
	1	2	3	4	5	6	7	8

Operation Force: 8N Max
 Stroke: 1.0mm
 Operation Temp: -40°C to +90°C
 Storage Temp: -40°C to +90°C
 Electrical Life: 2000 operations cycles per switch
 24VDC, 25mA
 Non-switching Rating: 100mA, 50VDC
 Switching rating: 25mA, 24VDC
 Insulation Resistance: 100m Ohm, 500VDC

Dielectric Resistance: 50Hz 500VAC/1minute
 Capacitance: 5pF max
 Circuit: Single pole single throw

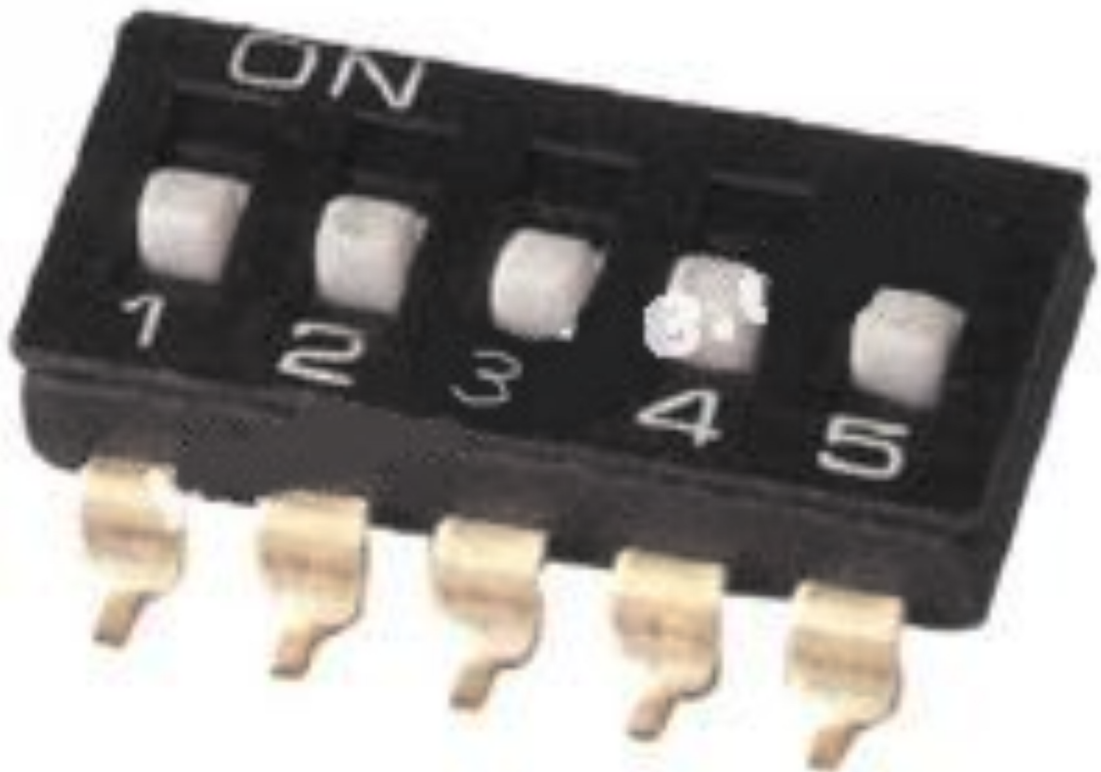

RoHS Compliant		SCHMID-M	
APPD.		TOLERANCE	PART NAME
DWG. HELEN	SCALE	.0 ± 0.38 .00 ± 0.25 ANG. ± 3°	DIP Switches - SMT
DATE	UNIT M M	SIZE. A 4	PART NO.
2011/5/31	PAGE 1 OF 1	REV. A	SM-DS-SMT-05