

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C

D

E



F

G

H

Operation Force: 8N Max
Stroke: 1.0mm
Operation Temp: -40°C to +90°C
Storage Temp: -40°C to +90°C
Electrical Life: 2000 operations cycles per switch
24VDC, 25mA
Non-switching Rating: 100mA, 50VDC
Switching rating: 25mA, 24VDC
Insulation Resistance: 100m Ohm, 500VDC

Dielectric Resistance: 50Hz 500VAC/1minute
Capacitance: 5pF max
Circuit: Single pole single throw

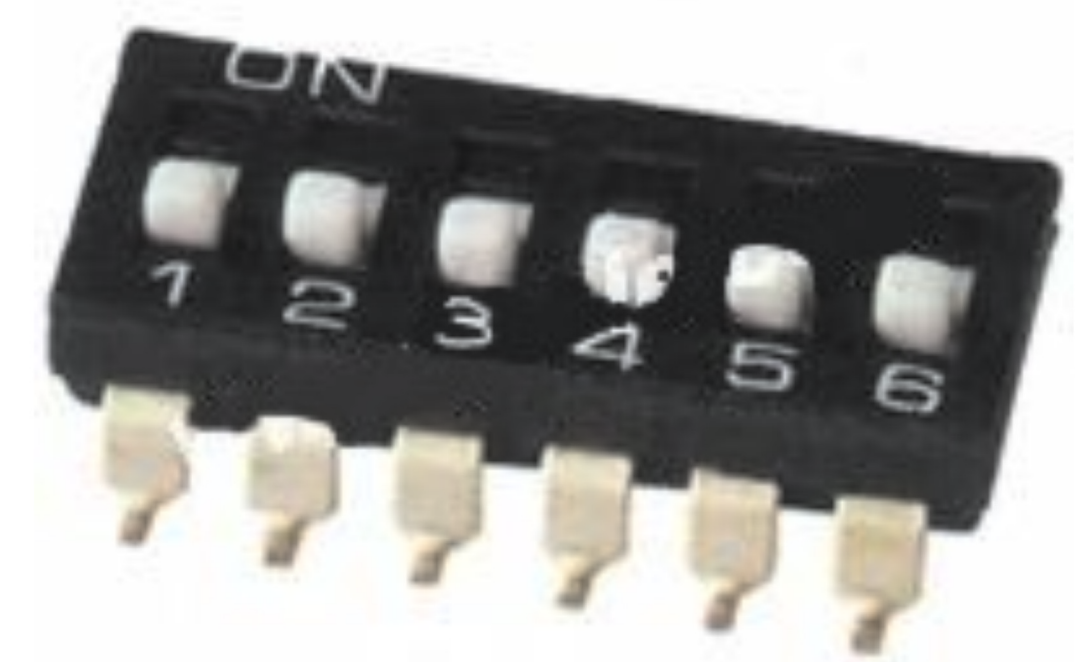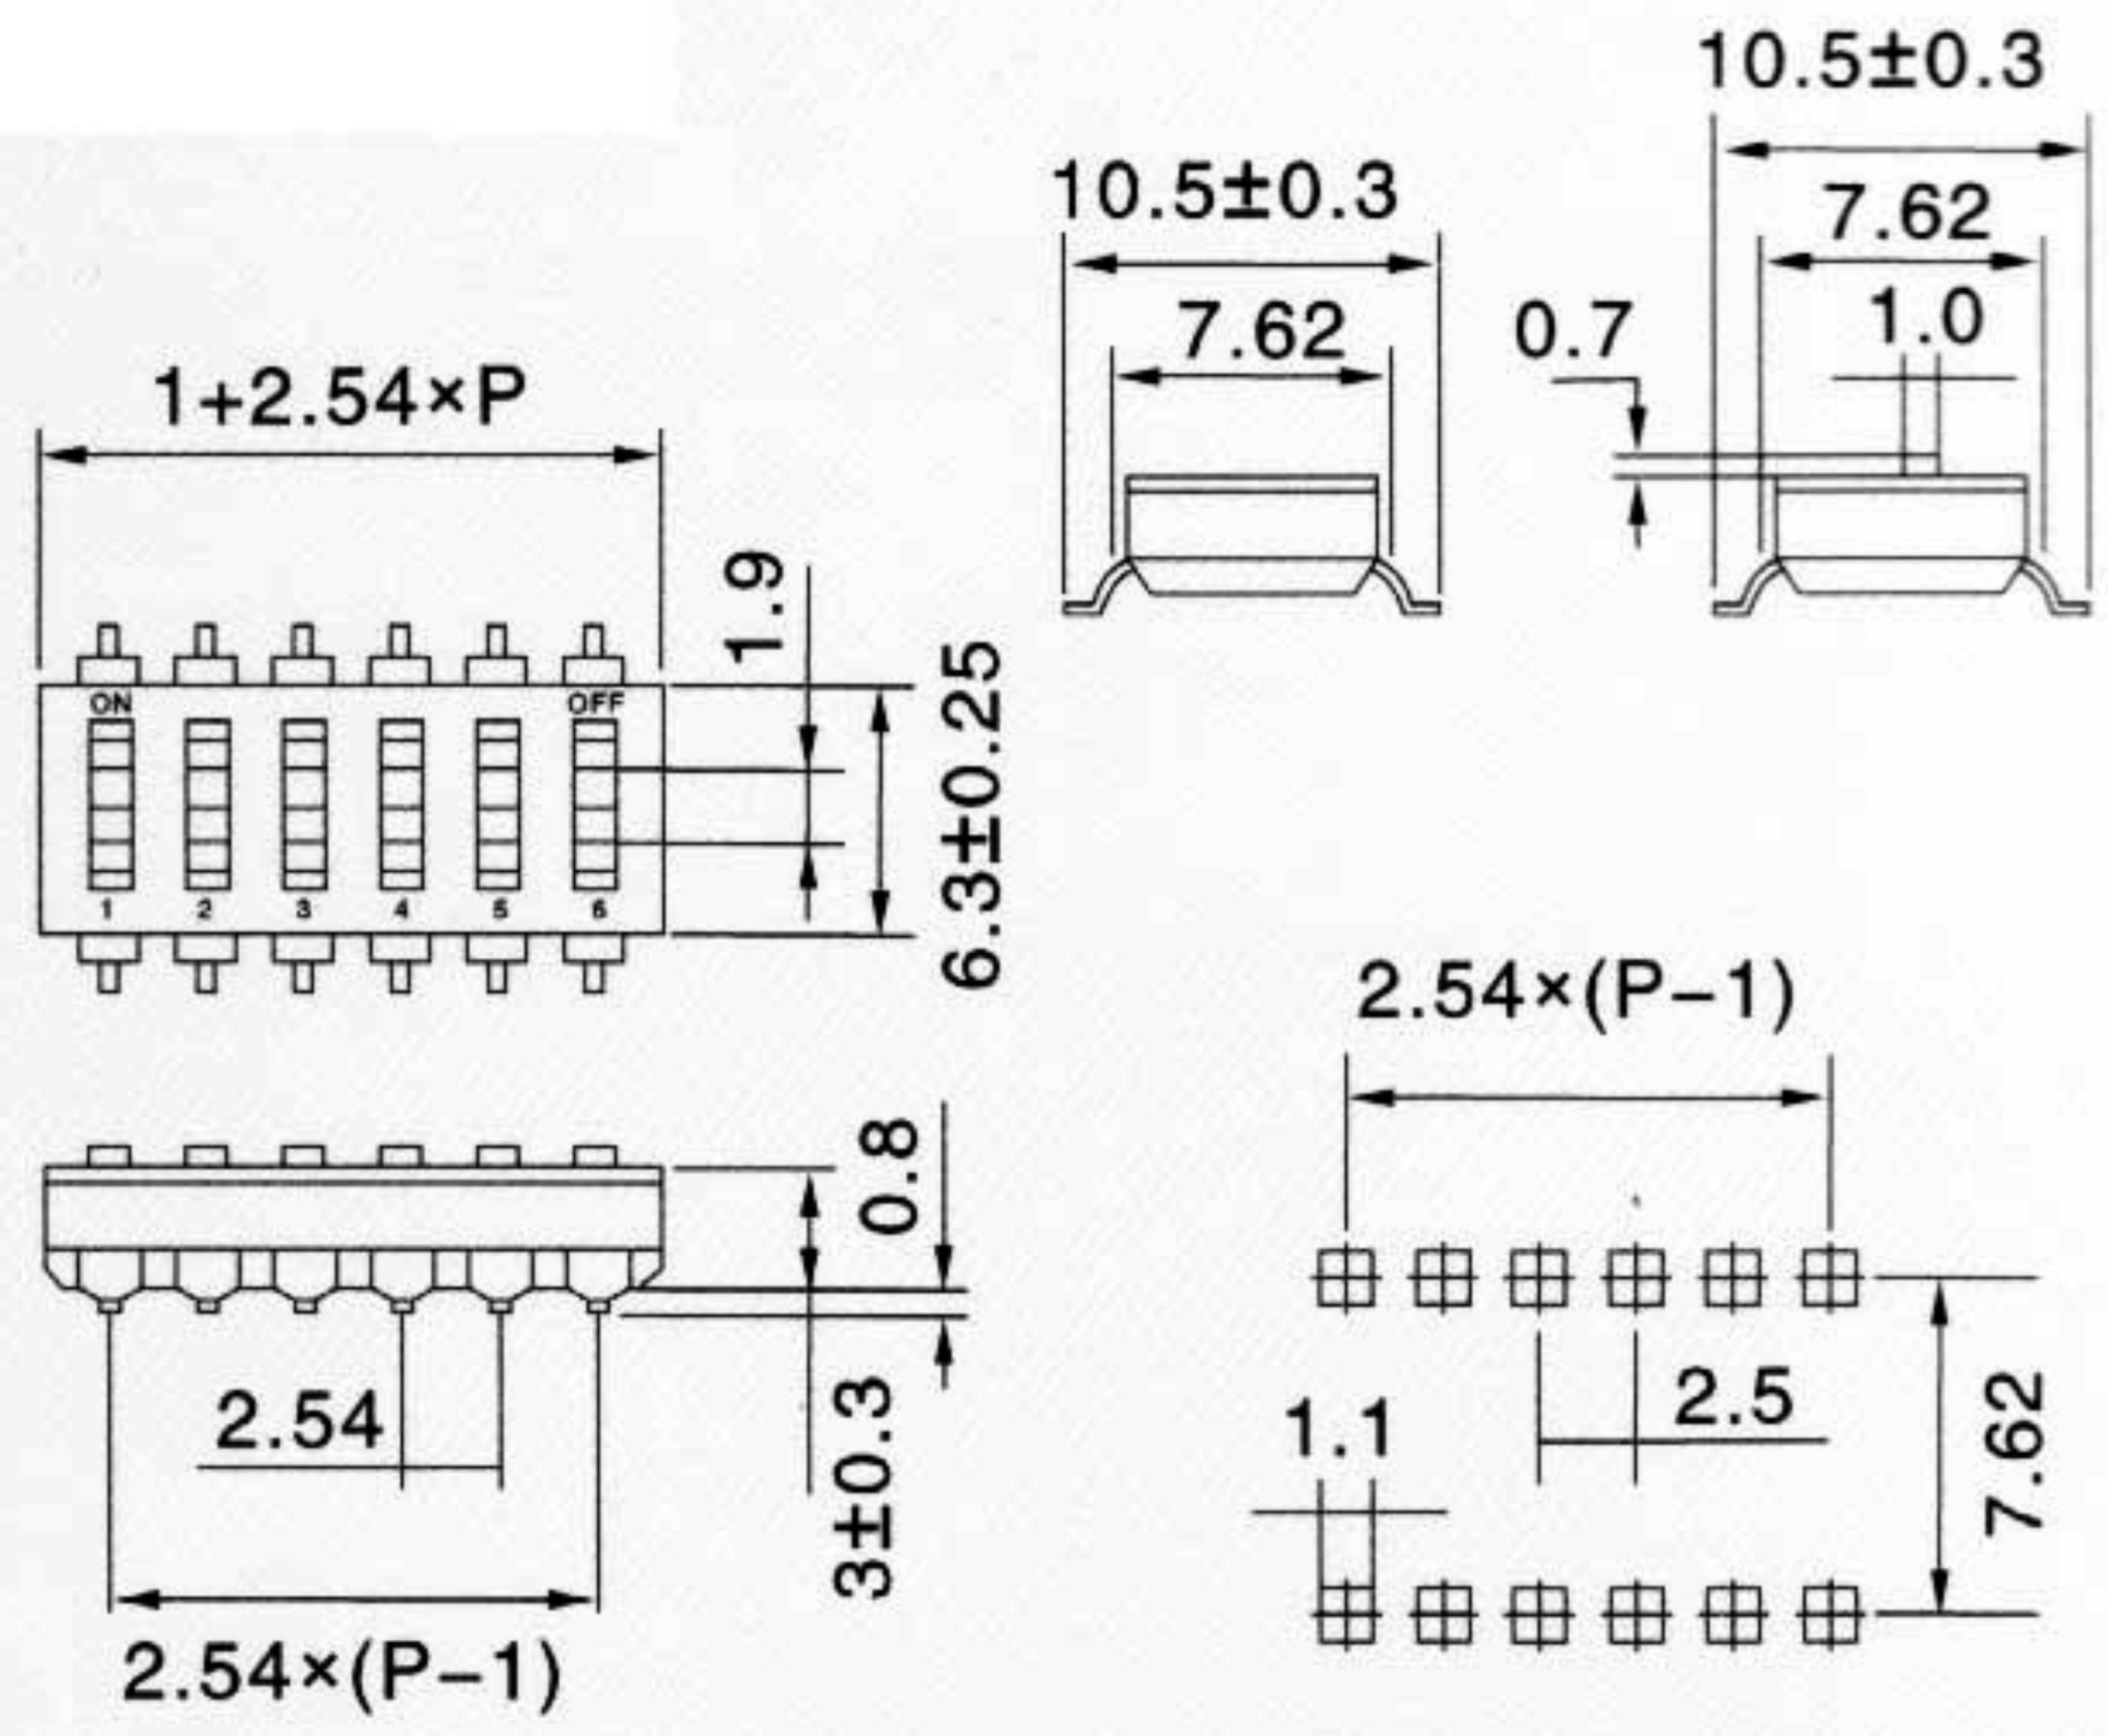

RoHS Compliant		SCHMID-M	
APPD.		TOLERANCE	PART NAME
DWG. HELEN	SCALE	.0 ± 0.38 .00 ± 0.25 ANG. ± 3°	DIP Switches - SMT
DATE	UNIT M M	SIZE. A 4	PART NO.
2011/5/31	PAGE 1 OF 1	REV. A	SM-DS-SMT-06

1 2 3 4 5 6 7 8