

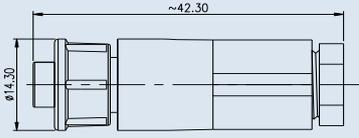
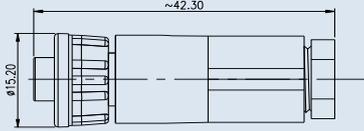
MINI SERIES

CHOGORI

MINI Series Specifications

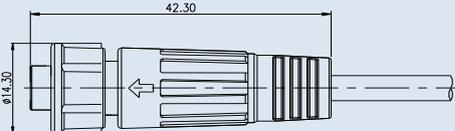
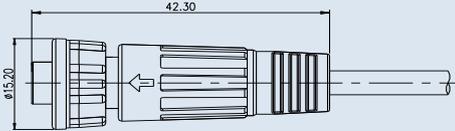
Mini Series Male connector & Male pin

Description	Field Installable, 180° Lock Bayonet Type, Solder	Field Installable, 180° Screw Type, Solder
Figure		

Drawing		
---------	-----------------------------------------------------------------------------------	------------------------------------------------------------------------------------

Part-No.	Contacts	Cable Range(mm)	Part-Number	Contacts	Cable Range(mm)	Part-Number
		4	3.5 - 6.8	21004121-01	4	3.5 - 6.8

Description	Molded, 180° Lock Bayonet Type, Solder	Molded, 180° Screw Type, Solder
Figure		

Drawing		
---------	-------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------

Part-No.	Contacts	Cable Range(mm)	Part-Number	Contacts	Cable Range(mm)	Part-Number
		4	3.5 - 6.8	21004123-01-XXX	4	3.5 - 6.8

Specifications	
Number of Contacts	4
Wire Gauge	0.34mm ² (22AWG)
Cable Range	3.5mm - 6.8mm
Environmental Protection	IP67
Mechanical Life	500 mating cycles
Operating Temperature	- 40°C - 80°C
Voltage Rating	50V
Rated Current(40°C)	5A

COMPANY PROFILE
500 Series
Mini Series
Standard Series
Middle Series
Large Series
Distributor Series
RJ45 Series
USB Series
D-Sub series
T Adapter Series
Splitter Series
HDMI Series
M8/M12 CONN Series
M Series Distributor