

M8/M12 CONN SERIES

CHOGORI


Y-coupler M12-male to M8-female Replaced

Male straight to Female straight



Description M12-Male to 2xM8-Female





Drawing

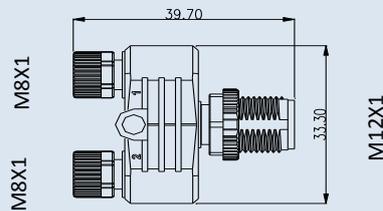

Contact layout

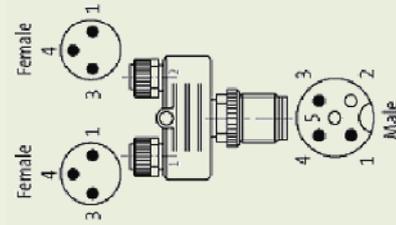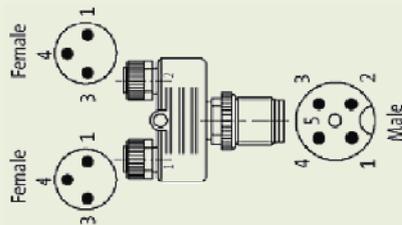

Circuit diagram



Part No.

54050115-01

54050115-02

Specifications

Voltage Rating	60 V DC
Rated Current(40°C)	4 A
Locking of Ports	Screw thread M8 / M12 × 1 mm (recommended torque 0.4/0.6 Nm), self-securing
Environmental Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Mechanical Life	100 mating cycles
Operating Temperature	-20°C - 85°C, depending on cable quality