


Shielded D-Sub Backshells DVPMK Series

TECHNICAL SPECIFICATIONS

Material:	ABS Plastic, Ni-plated
Temp. range:	-40°C - 110°C
Cable strain relief:	Polycarbonate, PC UL94 V-0
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Long jackscrews with moulded top for colour coding
Cable outlet:	Angled
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

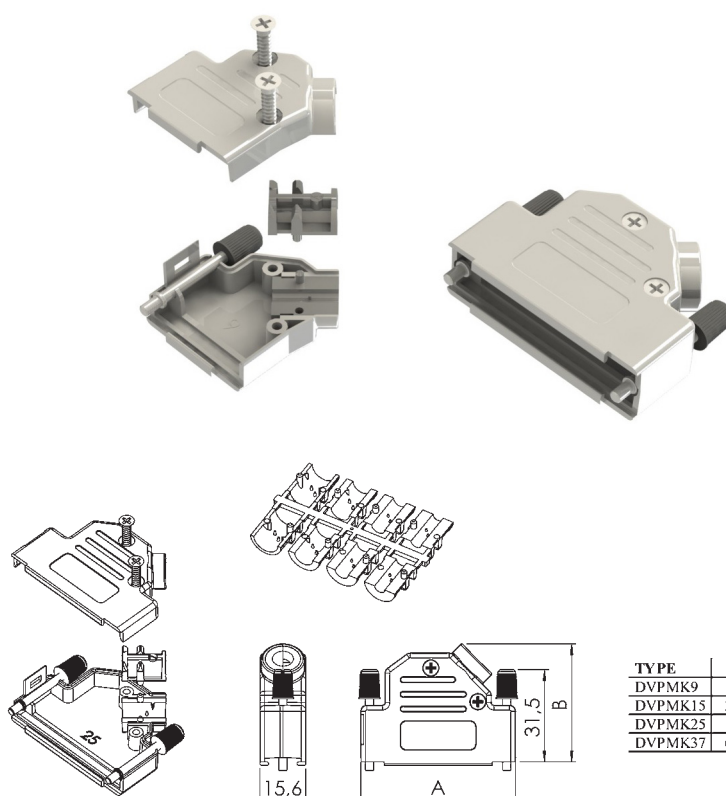

TYPE	A	B
DVPMK9	31	36,2
DVPMK15	39,3	40,2
DVPMK25	53	40,2
DVPMK37	69,5	40,2

PART NUMBERING SYSTEM

DVPMK25 - - RED - K

Series:	_____
DVPMK	_____
Size:	_____
9, 15, 25 or 37	_____
Thread (jackscrew):	_____
Omit = UNC 4-40	_____
M2.5	_____
M2.6	_____
M3.0	_____
Colour (jackscrew):	_____
Omit = Black	_____
Other colours available: beige, blue, brown, green, grey, ivory, red, white and yellow	_____
Packaging:	_____
K = Kit package	_____
BULK = Bulk / 100 pcs	_____

FEATURES

- Available in sizes 9, 15, 25 and 37
- Minimise interference from electromagnetic and RF sources
- Non-static parts avoid ESD problems
- Accept round foil and braided cable types
- Approved according VDE 0871, FCC 20780 and 89/336/EU
- Company logotype available upon request
- Long jackscrews with UNC 4-40 thread as standard, M2.5, M2.6 or M3.0 as option
- For custom designed solutions, please consult factory