
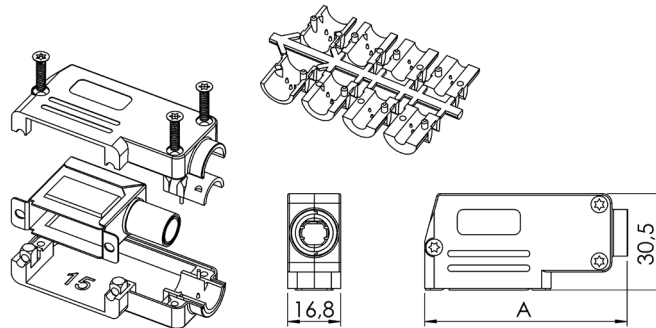


Shielded D-Sub Backshells DSK-SL Series

TECHNICAL SPECIFICATIONS

Material insulator:	Polycarbonate UL94 V-0
Material shielding:	Zi-plated steel
Temp.range:	-40°C - 105°C
Cable strain relief:	Crimp ferrule with anchor ferrule
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Integrated UNC 4-40 threads for slidelock or panel assembly
Cable outlet:	Side
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

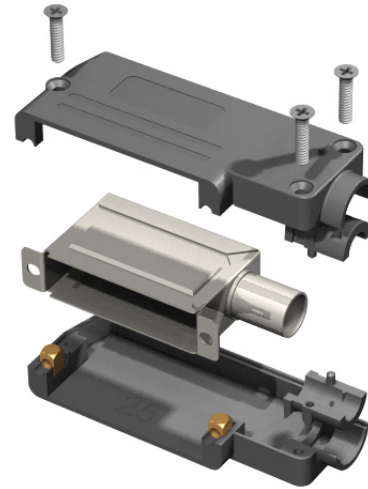

TYPE	A
DSK9-SL	56,3
DSK15-SL	64,3
DSK25-SL	78,3

PART NUMBERING SYSTEM

DSK9 - SL - R10.6 - SR9.0/8.1 - - K

Series:	_____
DSK-SL	_____
Size:	_____
9, 15 or 25	_____
Crimp ferrule:	_____
See separate list	_____
Anchor ferrule:	_____
See separate list	_____
Colour :	_____
Omit = Black	_____
Other colours available: beige, blue, brown, green, grey, ivory, red, white and yellow	_____
Packaging:	_____
K = Kit package	_____
BULK = Bulk / 100 pcs	_____

FEATURES

- Available in sizes 9, 15 and 25-way
- Crimped cable retention guarantee 360° shielding
- Accept round foil and braided cable types
- Company logotype available upon request
- Approved according VDE 0871, FCC 20780, IEEE 802.3 and 89/336/EU
- Integrated UNC 4-40 threads for slidelock or panel assembly
- For custom designed solutions, please consult factory