



A	22.0Max
B	17.5Max
C	4.0±1.0
E	10.0±0.5
F	13.0±1.0
G	0.8±0.1
H	23.0Max

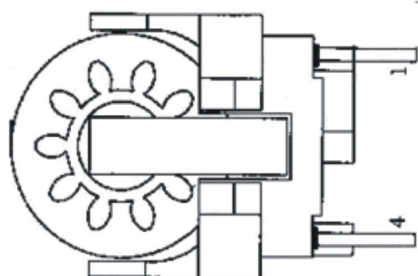

(WDG)	N1	N2
(PIN)	1-4	2-3
INDUCTANCE	(1-4) and (2-3)	6,8mH/+50% /-30% 10K/0.1mA
DCR	(1-4) and (2-3)	2.5 Ω Max
(TURN)	φ 0.23*150TS (REF)	φ 0.23*150TS (REF)
(WIRE)	UEW	UEW



RoHS Compliant		SCHMID-M	
APPD.	HELEN		TOLERANCE .000 ±0.13 ANG±3° .00 ±0.25 .0 ±0.38
DWG.	ABBY		
DATE	2011/08/05	UNIT M M	SIZE A 4
PAGE	1 OF 1	REV.	A
		PART NAME	
		PART NO. AUT20-682N-NP	