


# Radial Aluminum Electrolytic Capacitor – JRC

## FEATURES

- Load life of 2000 hours at 105°C
- Switch power supply
- High Frequency
- Low Impedance

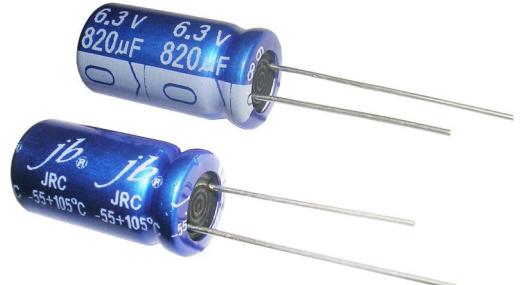

## SPECIFICATIONS

Operating Temperature Range (°C)	-55°C ~ +105°C
Rated Voltage Range (V)	6.3 ~ 100
Capacitance Range (μF)	0.47 ~ 15000
Capacitance Tolerance (25°C, 120Hz)	±20%
Leakage Current (μA)	

1=0.02CV or 3 whichever is greater (at 25°C, after 2 minutes), C: Nominal Capacitance (μF) V: Rated Voltage (V)

Dissipation Factor (25°C, 120Hz)

Rated Voltage	6.3	10	16	25	35	50	63	100
Tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08

Add 0.02 per 1000μF or move.

Characteristics of Low Temperature

Load Life (+105°C)

Impedance at -10°C, 100KHz<200% of initial specified value at +20°C, 100KHz (Impedance ratio at 100KHz)

After life test at condition stated in the table below, the capacitors shall meet the following requirement.


Case Dia	Test time (hrs)
ΦD≤8	1000
ΦD>8	2000

Ripple current applied

Leakage Current	Not more than the specified value.
Capacitance Change	Within±20% of the initial value
Dissipation Factor	Not more than 200% of the specified value.

Shelf Life (+105°C) 1000 hours. No voltage applied. After test: U<sub>R</sub> to be applied for 30 minutes, 24 to 48 hours before measurement

## DIMENSIONS (mm)

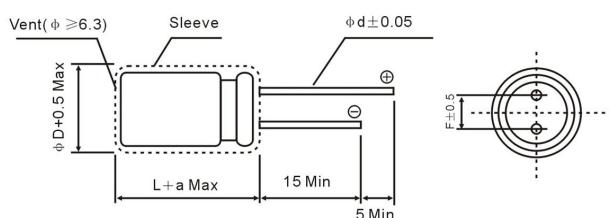

ØD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0		7.5	
Ød	0.5		0.6			0.8	
a		1.0		2.0			

## MULTIPLIER FOR RIPPLE CURRENT

### Frequency coefficient

Freq(Hz) Cap(μF)	120	1K	10K	100K
0.47~4.7	0.40	0.68	0.78	1.0
5.6~47	0.50	0.76	0.87	1.0
56~270	0.70	0.85	0.90	1.0
330~1000	0.80	0.93	0.98	1.0
1200~15000	0.90	0.95	1.0	1.0

### Temperature coefficient

Temperature(°C)	+70	+85	+105
Factor	1.96	1.68	1.0

# Radial Aluminum Electrolytic Capacitor – JRC

## STANDARD RATINGS

<b>µF</b>	<b>V</b>	<b>6.3V</b>	<b>10V</b>	<b>16V</b>	<b>25V</b>	<b>35V</b>	<b>50V</b>	<b>63V</b>	<b>100V</b>
<b>1</b>	--	--	--	--	--	--	5x11	--	
<b>2.2</b>	--	--	--	--	--	--	5x11	--	
<b>3.3</b>	--	--	--	--	--	--	5x11	--	
<b>4.7</b>	--	--	--	--	--	5x11	5x11	--	
<b>6.8</b>	--	--	--	--	--	5x11	5x11	--	
<b>10</b>	--	--	--	--	--	5x11	5x12	5x12	6x11
<b>15</b>	--	--	--	--	--	5x11	5x12	--	
<b>18</b>	--	--	--	--	--	5x11	5x12	--	
<b>22</b>	--	--	--	--	5x11	5x11	6x11	6x11	8x12
<b>27</b>	--	--	--	--	--	5x11	6x11	--	
<b>33</b>	--	--	--	--	--	6x11	6x11	6x11	10x13
<b>39</b>	--	--	--	--	--	6x11	6x11	--	
<b>47</b>	--	--	--	5x11	5x11	6x11	6x12	8x12	10x17
<b>56</b>	--	--	--	5x11	5x11	6x11	6x12	--	
<b>68</b>	--	--	--	5x12	5x12	6x11	8x12	10x13	10x21
<b>82</b>	--	--	--	--	6.3x11	6.3x11	8x12	--	
<b>100</b>	--	--	5x11	6x11	6x11	8x12	8x12	10x17	13x20
<b>120</b>	--	--	5x11	6x11	6.3x11	8x12	8x16	--	
<b>150</b>	5x11	5x11	6x11	8x12	8x12	8x20	--		
<b>180</b>	5x11	6.3x11	6x11	8x12	8x14	8x20	--		
<b>220</b>	6x11	6x11	6x11	8x12	10x15	10x17	10x21	16x26	
<b>270</b>	6x11	6.3x11	8x12	8x14	10x15	10x21	--		
<b>330</b>	6x11	8x12	8x12	10x12	10x17	10x21	13x20	16x26	
<b>390</b>	6x12	8x12	--	8x20	10x17	12.5x20	--		
<b>470</b>	6x12	8x12	8x12	10x15	10x17	12.5x20 13x21	13x20	16x31	
<b>560</b>	8x12	8x12	8x16	8x20	10x25	13x21	--		
<b>680</b>	8x12	8x12	8x16	10x17	12.5x20	13x26	16x26		
<b>820</b>	8x14	8x16	8x20	10x25	12.5x20	13x25	--		
<b>1000</b>	8x16	8x16	10x17	10x21	13x25	13x25	16x26		
<b>1200</b>	8x16	10x17	10x21	12.5x20	16x20	13x30	16x30		
<b>1500</b>	8x16	10x21	12.5x20	12.5x20	16x20	16x26	--		
<b>1800</b>	10x15	10x25	12.5x20	13x26	16x26	16x32	--		
<b>2200</b>	10x15	12.5x20	12.5x20	13x26	16x26	16x35	18x40		
<b>2700</b>	10x21	13x21	16x26	13x26	16x35	18x40	--		
<b>3300</b>	12.5x20	12.5x20	13x30	16x26	16x35	18x40	--		
<b>3900</b>	13x25	--	16x26	16x26	18x40	--	--		
<b>4700</b>	13x25	13x26	16x26	16x26	--	--	--		
<b>5600</b>	16x26	16x30	16x35	--	--	--	--		
<b>6800</b>	16x26	16x30	18x25	--	--	--	--		
<b>8200</b>	16x32	16x35	--	--	--	--	--		
<b>10000</b>	16x35	16x40	--	--	--	--	--		