


REV	DATE	DESCRIPTION
X1	03/24 - 2025	New Issue

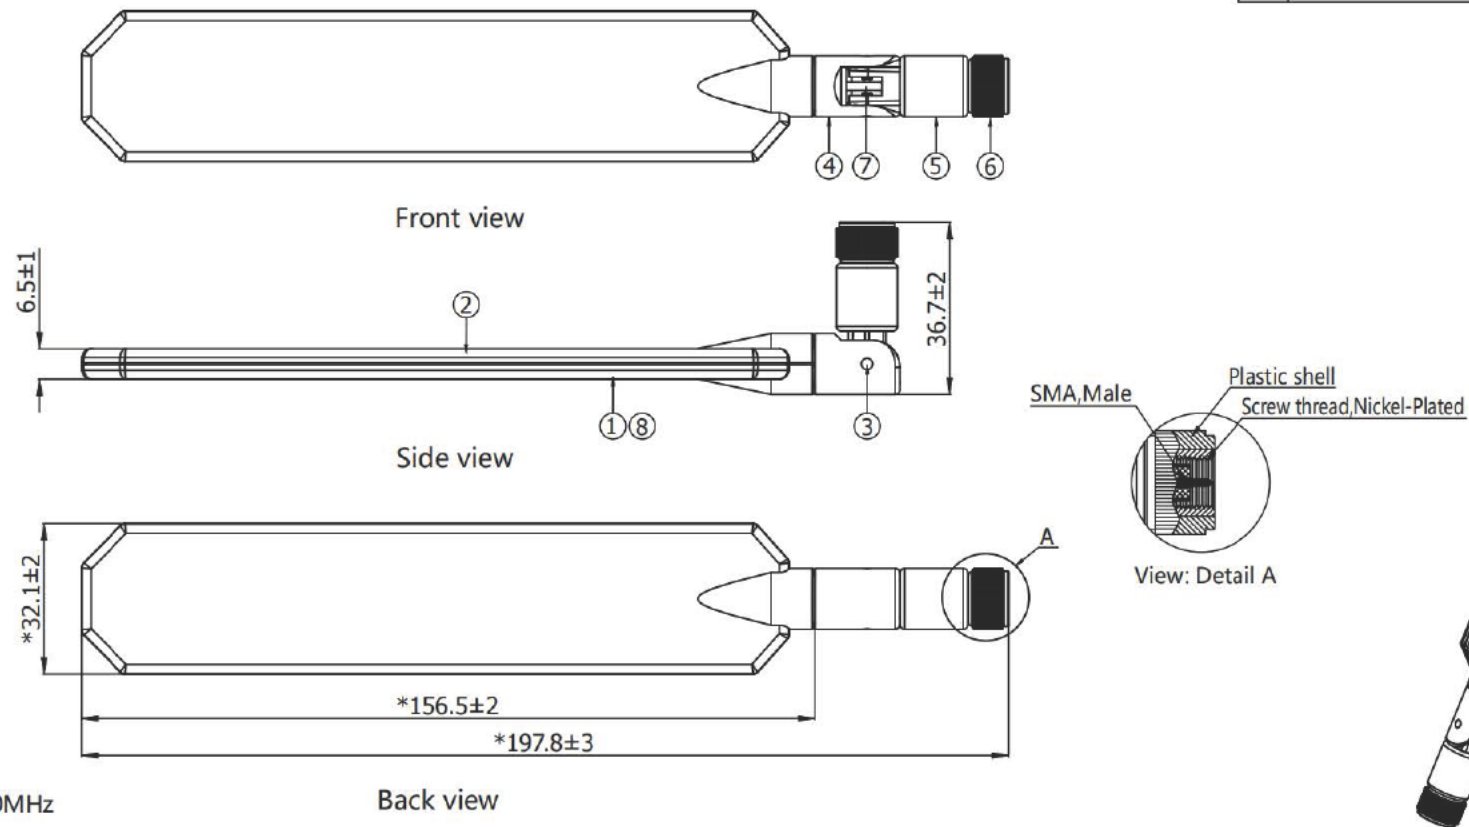

Specification:

1.Electrical properties:

Frequency Range:617~6000MHz

VSWR:≤4.0@617~960MHz;

≤3.5@1710~2700MHz;

≤3.5@3300~6000MHz;

Gain: 2dBi@617~960MHz;

4dBi@1710~2700MHz;

6dBi@3300~6000MHz;

Impedance:50Ω

2.Waterproof Rating:IP65;

3.The antenna complied with ROHS 2.0 ;

4.Connector complied with the 48-hour salt spray test

5.Important dimensions marked with "*",and () for reference.

8	Antenna	PCB Board: FR4; Color: Black solder resist ink	1	501-1-1367-X4
7	Cable	RG-178 cable; Color: Brown&transparent	1	
6	Connector	SMA, Male; Shell Color: Black	1	
5	Down-Base	PC+PBT; Color: Black	1	
4	Up-Base	PC; Color: Black	1	
3	Rivet	POM; Color: Black	2	
2	Right-Cover	ABS; Color: Black	1	
1	Left-Cover	ABS; Color: Black	1	
NO	DESCRIPTION		Q'TY	REMARK

CUSTOMER'S SINGATURE	XXX.	±2.0	APPROVED	CUSTOMER:		
	XX.	±1.0		PART NO: SM ANT WZ5 SMA		
	X.	±0.5	CHECKED	PART NAME:		
	.X	±0.3		Z&X P/NO:		
	.XX	±0.2	DRAWING	REV	UNIT	FILE:
			Paul	X1	mm	SHEET: 1/1

SCHMID-M